
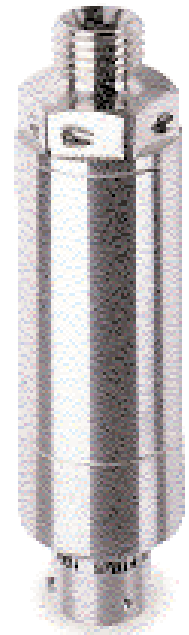


3000S  
SERIES  
SERIES  
SERIES

## PMP/PTX 3000 Series

Amplified Aerospace Pressure Transducers

- FAA & CAA JTSO certification available on request
- Full EMI and lightning protection
- High accuracy and stability
- Wide operating temperature range
- Affordable solution with low technical risk
- Gauge, absolute and differential versions

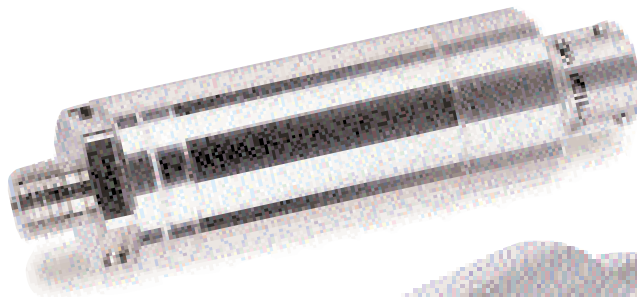

**GE Druck**

# PMP/PTX 3000 Series


## Amplified Aerospace Pressure Transducers

**Maintaining affordability, while maximizing performance and minimizing risk, is the challenge facing the modern day aerospace transducer design engineer. The PMP/PTX 3000 series of high level output pressure transducers fully meets this challenge, using proven technology within flight certified hardware.**

At the heart of the 3000 Series is an advanced high stability pressure sensing element, micro-machined from single crystal silicon in Druck's own Class 100 processing facility. Resistors are diffused into the silicon diaphragm by ion implantation and form a fully active four-arm strain gauge bridge. Single crystal silicon is perfectly elastic and has excellent mechanical properties. Druck technology offers the following features:

- Excellent linearity
- Negligible hysteresis
- Enhanced long-term stability
- High overpressure capability
- Low mass offering fast response and low 'g' effect

The micro-machined silicon sensing element is atomically bonded to a pyrex (glass) base and assembled into a high integrity glass-to-metal seal. Pressure media is isolated from the silicon element by a compliant metal diaphragm, resulting in a hermetic pressure module.



*Silicon wafers being loaded into an oxidation furnace*

Every pressure module is temperature cycled to enhance long-term stability prior to installation of surface mount signal conditioning electronics. The electronics control the supply voltage to the strain gauge bridge and provide a high level output proportional to the applied pressure. Temperature signals, taken directly from the silicon sensing element, allow the bridge output to be corrected for changes in balance and sensitivity due to temperature change.

Integral protection circuitry includes an array of in-line filters, providing a low impedance path to case at high frequencies. All supply and signal lines are protected against high voltage transients and reverse polarity connection, resulting in compliance with stringent EMI and lightning requirements.

The pressure sensing module and electronics are housed within the case assembly which, together with pressure and electrical connectors, is fully electron beam welded to ensure high reliability. All wetted and external surfaces are manufactured from stainless steel or hastelloy. Prior to acceptance testing, all transducers are environmentally stress screened to optimize long-term performance and to remove premature failures.

Flexibility of design is maintained without compromising customer choice of interface, pressure range, output type and, most importantly, flight certification. The PMP/PTX 3000 Series is FAA/CAA flight certified, qualified to the requirements of JTSO C47 and RTCA/DO-160. It meets the demands of even the harshest environment and offers an affordable measurement solution with minimal technical risk.



*Druck's advanced in-house test facilities include a vibration rig which enables qualification of aerospace pressure transducers in accordance with programmable simulation parameters.*

## PERFORMANCE SPECIFICATION

INPUT PARAMETERS	GAUGE AND ABSOLUTE	DIFFERENTIAL
Pressure Range <i>Other engineering units can be specified</i>	5 psi to 10,000 psi	5 psi to 500 psi Static pressure to 1000 psi
Proof Pressure <sup>1</sup>	2X range to 15,000 psi maximum	
Burst Pressure	6X minimum to 20,000 psi maximum	6X minimum (2X minimum to 300 psi maximum in negative direction)
Line Pressure	—	1000 psi
Positive Pressure Media	Fluids and gases compatible with 316L stainless steel and hastelloy C276	
Negative Pressure Media	—	Stainless steel 316L, glass, silicon and structural adhesive
Supply Voltage <sup>2</sup>	Aircraft 28 Vdc	
Resolution	Infinite	

OUTPUT PARAMETERS	GAUGE AND ABSOLUTE	DIFFERENTIAL
Output Configuration <sup>1</sup>	4 to 20 mA (2 wire) 0 to 5 Vdc (3 wire) 0 to 5 Vdc (4 wire) 0 to 5 Vdc (4 wire) unbalanced output others available on request, e.g. 0 to 10V, 1 to 6V	
Output Impedance	Less than 20 ohms (PMP model)	
Total Accuracy <sup>1</sup> <i>Includes the effects of non-linearity, hysteresis, repeatability, zero &amp; span setting and thermal errors</i>	±0.75% FS over -40° to 90°C (-40° to 190°F) or ±1.25% FS over -54° to 125°C (-65° to 250°F)	
Stability	Typically less than ±0.05% FS/annum	

INTERFACE PARAMETERS	GAUGE AND ABSOLUTE	DIFFERENTIAL
Pressure Connection	7/16" UNJF to MS 33656-4 Others available on request	
Electrical Connection	6 pin plug to MIL-C-26482 Others available on request	

ENVIRONMENTAL PARAMETERS	GAUGE AND ABSOLUTE	DIFFERENTIAL
Operating Temperature Range	-54° to 135°C (-65° to 275°F)	
Compensated Temperature Range	See Total Accuracy	
Storage Temperature Range	-54° to 150°C (-65° to 300°F)	
Weight	Less than 5.6 oz.	Less than 8.5 oz.
Altitude, Humidity, Salt, Fog, Sand and Dust, Fungus Resistance, Explosion-Proof	Not susceptible due to all welded hermetic construction	
Acceleration, Vibration and Mechanical Shock	Qualified to RTCA/DO-160D	
EMI, Power Supply and Lightning	Fully protected and qualified to RTCA/DO-160D	
High/Low Operating Temperature	Qualified to RTCA/DO-160D	
Fire Resistance	Qualified to 1,100°C (2,000°F) flame for 15 minutes	
Predicted Reliability (MIL-HDBK-217F)	5 FPMH achievable - refer to Druck	

### Notes:

1. Tested as part of the Acceptance Test Procedure (ATP)
2. Qualified in accordance with the requirements of RTCA/DO-160

*Continuing development sometimes necessitates  
specification changes without notice.*

*Druck is an ISO 9001 and AS9100  
registered company.*



# PMP/PTX 3000 Series

## Amplified Aerospace Pressure Transducers

### ORDERING INFORMATION

Please state the following:  
 (1) Select model number

Code	Basic Type Number
PMP	High level voltage output
PTX	4 to 20mA current

Code	Pressure Reference
30	Gauge, sealed gauge or absolute
31	Differential

Code	Electrical Connection
0	6 PIN D38999/25YB98PB
1	6 PIN D38999/25YA35PN
2	6 PIN MIL-C-26482 series 1 shell size 10
3	6 PIN MIL-C-26482 series 2 shell size 10
4	4 PIN MIL-C-26482 series 1 shell size 8
5	5 PIN MIL-C-83723 shell size 10
6	other, please specify



Code	Output
0	2 wire (PTX model): 4 to 20mA
1	3 wire: 0 to 5V
2	4 wire: 0 to 5V (Vcm=5V)
3	4 wire common 0V: 0 to 5V (Vcm=1.2V)
4	4 wire: 0 to 5V (Vcm=0V) (Linked internally) Note: Vcm=Common mode voltage
5	other, please specify

PMP	31	6	1
-----	----	---	---

- (2) Pressure range and units
- (3) Gauge, sealed gauge or absolute
- (4) Output level (PMP model), e.g. 0 to 10V
- (5) Pressure connection (include negative side for differential)
- (6) Calibrated temperature range
- (7) Mating electrical connector (if required)
- (8) JTSO certification (if required)

### INSTALLATION DRAWINGS: Dimensions in inches

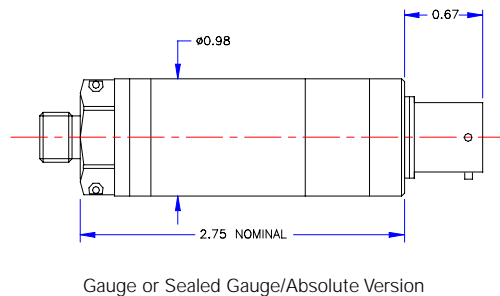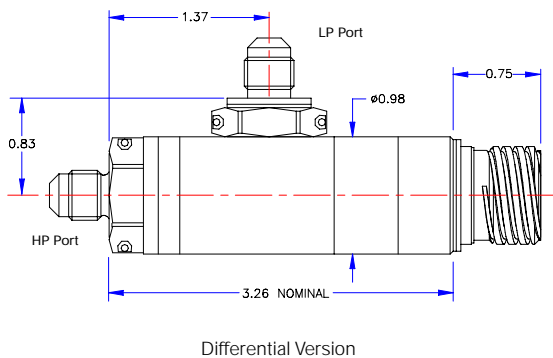

Electrical Connector  
 Pin Allocations  
 (others available, please specify)

2 WIRE	
Function	Connector
Supply +	A/1
Supply -	B/2
3 WIRE	
Function	Connector
Output +	A/1
Common	B/2
Supply +	D/4
4 WIRE	
Function	Connector
Output +	A/1
Output -	B/2
Supply -	C/3
Supply +	D/4

### RELATED PRODUCTS

Druck manufactures a comprehensive range of pressure sensors indicators, calibrators, controllers, Air Data Test Systems and deadweight testers. The range of portable calibrators also covers temperature and electrical parameters.



Refer to Manufacturer for further information and data sheets.

### CALIBRATION STANDARDS

Transducers manufactured by Druck are calibrated against precision pressure calibration equipment which is traceable to international standards.



Representative

Druck Incorporated  
 4 Dunham Drive, New Fairfield, CT 06812 USA  
 Tel: 203-746-0400, Fax: 203-746-2494  
 Email: usa.sales@druck.com  
 www.druck.com www.pressure.com