



REGULATORY AGENCY APPROVALS



E93779



LR89403

Manufactured to meet the requirements of ANSI/IEEE C57.13.  
Classified by U.L. in accordance with IEC 44-1



**APPLICATION:**  
Relaying and metering.

**FREQUENCY:**  
50-400 Hz.

**INSULATION LEVEL:**  
600 Volts, 10 kV BIL full wave.

Terminals are brass screws No. 10-32 with one flatwasher and lockwasher.

Order mounting bracket kit 0221B01525 separately.

Multi-ratios available on request.

Approximate weight 53 lbs.


2

CATALOG NUMBER	CURRENT RATIO	RELAY CLASS	ANSI METERING CLASS AT 60HZ					CONTINUOUS THERMAL RATING FACTOR	
			BO.1	BO.2	BO.5	BO.9	B1.8	@ 30°C	@ 55°C
307-201	200:5	C50	0.6	0.6	1.2	1.2	2.4	2.0	2.0
307-251	250:5	C50	0.3	0.6	0.6	1.2	1.2	2.0	2.0
307-301	300:5	C100	0.3	0.3	0.6	0.6	1.2	2.0	2.0
307-401	400:5	C100	0.3	0.3	0.3	0.6	0.6	2.0	2.0
307-501	500:5	C100	0.3	0.3	0.3	0.3	0.6	2.0	1.5
307-601	600:5	C200	0.3	0.3	0.3	0.3	0.3	2.0	1.5
307-751	750:5	C200	0.3	0.3	0.3	0.3	0.3	2.0	1.5
307-801	800:5	C200	0.3	0.3	0.3	0.3	0.3	2.0	1.5
307-102	1000:5	C200	0.3	0.3	0.3	0.3	0.3	1.5	1.33
307-122	1200:5	C400	0.3	0.3	0.3	0.3	0.3	1.5	1.33
307-152	1500:5	C400	0.3	0.3	0.3	0.3	0.3	1.33	1.0
307-162	1600:5	C400	0.3	0.3	0.3	0.3	0.3	1.33	1.0
307-202	2000:5	C800	0.3	0.3	0.3	0.3	0.3	1.0	1.0
307-252	2500:5	C800	0.3	0.3	0.3	0.3	0.3	1.0	0.8
307-302	3000:5	C800	0.3	0.3	0.3	0.3	0.3	1.0	0.8
307-322	3200:5	C800	0.3	0.3	0.3	0.3	0.3	1.0	0.8
307-352	3500:5	C800	0.3	0.3	0.3	0.3	0.3	1.0	0.6

Approved for revenue metering by Industry Canada No. AE-0641

# Model 307

2

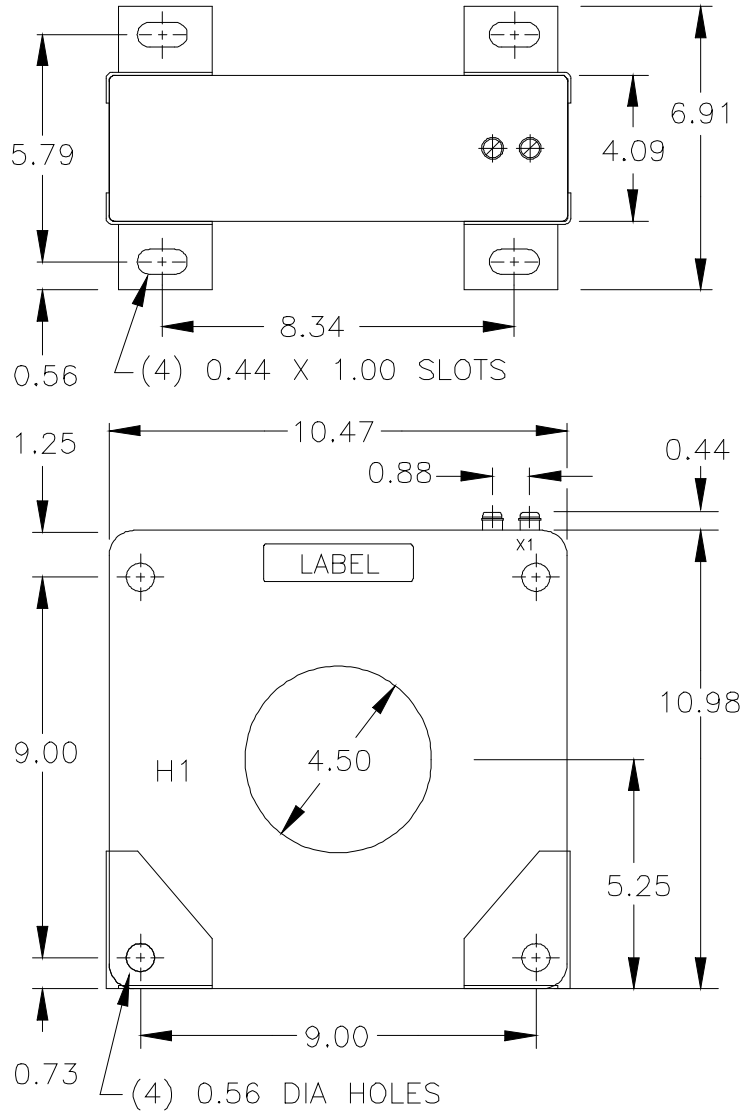

**USA, Canada, Asia, Latin America**  
Tel: +1-800-547-8629  
Fax: +1-905-201-2455  
e-mail: [sales.multilin@ge.com](mailto:sales.multilin@ge.com)

**Europe, Middle East, Africa**  
Tel: +34-94-485-88-00  
Fax: +34-94-485-88-45  
e-mail: [gemultilin.euro@ge.com](mailto:gemultilin.euro@ge.com)