



REGULATORY AGENCY APPROVALS



Manufactured to meet the requirements of ANSI/IEEE C57.13.
Classified by U.L. in accordance with IEC 44-1



APPLICATION:
Relaying and metering.

FREQUENCY:
50-400 Hz.

INSULATION LEVEL:
600 Volts, 10 kV BIL full wave.

Terminals are brass studs No.10-32 with one flatwasher, lockwasher and regular nut.

Multi-ratios available on request.


Approximate weight 70 lbs.

2

CATALOG NUMBER	CURRENT RATIO	RELAY CLASS	ANSI METERING CLASS AT 60HZ					CONTINUOUS THERMAL RATING FACTOR	
			BO.1	BO.2	BO.5	BO.9	B1.8	@ 30°C	@ 55°C
389-201	200:5	C50	0.6	1.2	1.2	2.4	4.8	2.0	2.0
389-251	250:5	C50	0.6	0.6	1.2	1.2	2.4	2.0	2.0
389-301	300:5	C100	0.6	0.6	0.6	1.2	2.4	2.0	2.0
389-401	400:5	C100	0.3	0.3	0.6	0.6	1.2	2.0	2.0
389-501	500:5	C100	0.3	0.3	0.3	0.6	0.6	2.0	2.0
389-601	600:5	C200	0.3	0.3	0.3	0.3	0.3	2.0	2.0
389-751	750:5	C200	0.3	0.3	0.3	0.3	0.3	2.0	2.0
389-801	800:5	C200	0.3	0.3	0.3	0.3	0.3	2.0	2.0
389-102	1000:5	C200	0.3	0.3	0.3	0.3	0.3	2.0	2.0
389-122	1200:5	C400	0.3	0.3	0.3	0.3	0.3	2.0	1.5
389-152	1500:5	C400	0.3	0.3	0.3	0.3	0.3	2.0	1.5
389-162	1600:5	C400	0.3	0.3	0.3	0.3	0.3	2.0	1.5
389-202	2000:5	C400	0.3	0.3	0.3	0.3	0.3	1.5	1.33
389-252	2500:5	C800	0.3	0.3	0.3	0.3	0.3	1.5	1.0

Model 389

2

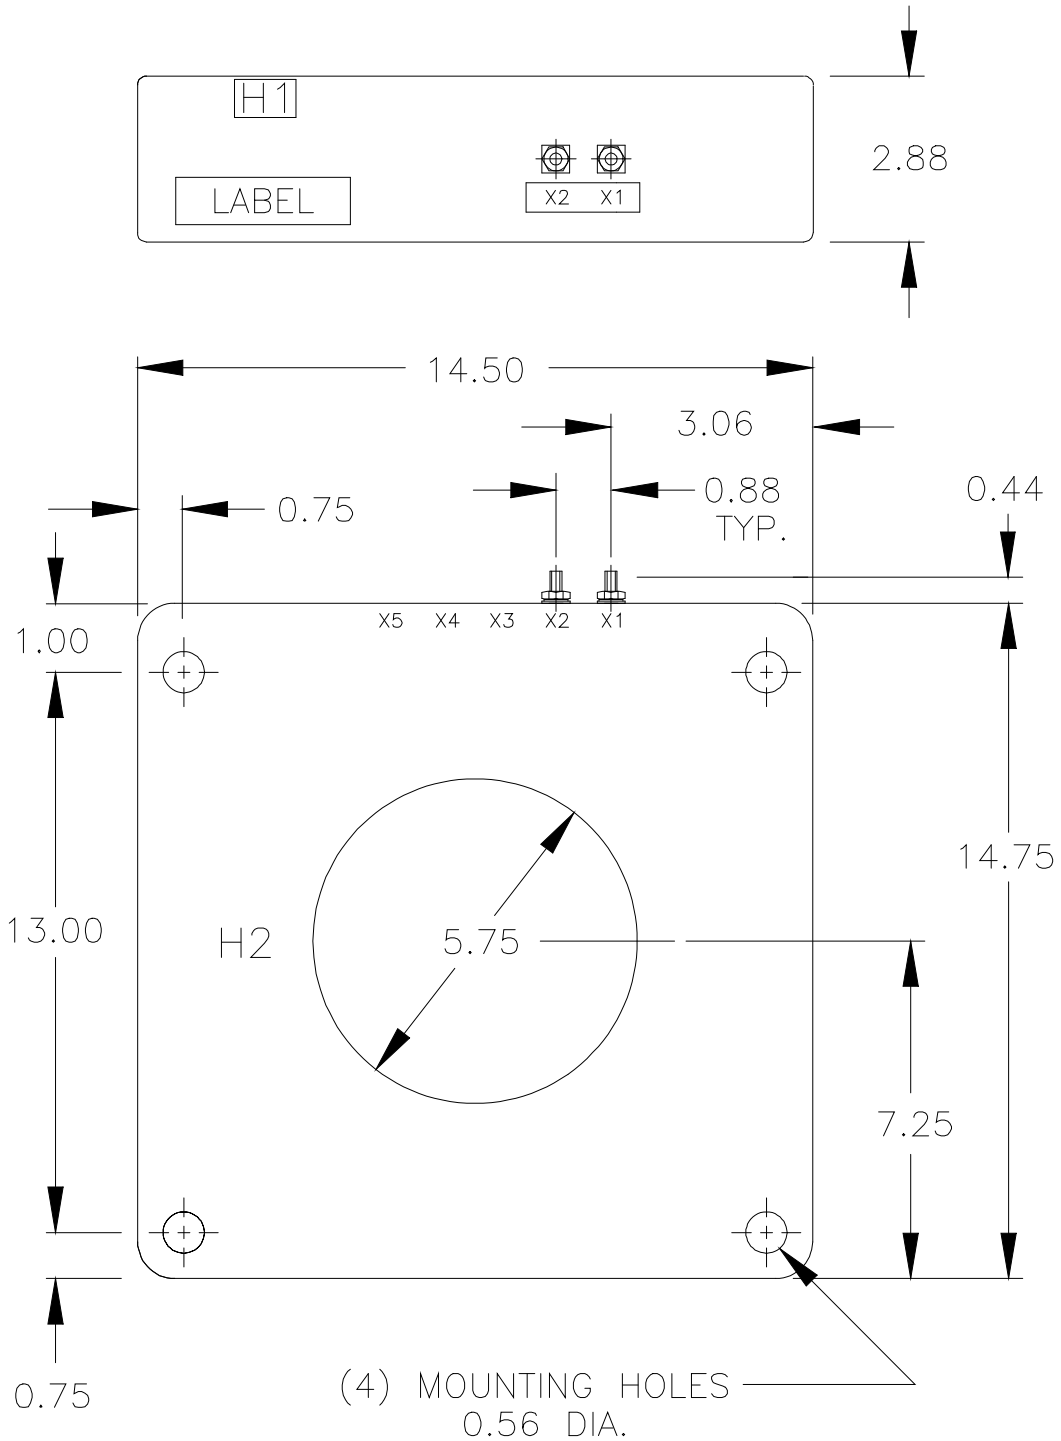

USA, Canada, Asia, Latin America
 Tel: +1-800-547-8629
 Fax: +1-905-201-2455
 e-mail: sales.multilin@ge.com

Europe, Middle East, Africa
 Tel: +34-94-485-88-00
 Fax: +34-94-485-88-45
 e-mail: gmultilin.euro@ge.com