

## Digital Video Recorder with Evidence Sharing Capability



*StoreSafe's built-in CD-R drive makes it easy to create an evidence CD you can share with law enforcement and others.*

**S**toresafe is a easy-to-use, stand-alone, full-featured multiplexer and digital recorder that can capture and print evidence.


StoreSafe is available in 4, 10, and 16 camera units with built-in 40, 80, or 160 GB hard drive—storing high-resolution color or B/W images for days, weeks, or months. StoreSafe also offers a 250 GB hard drive with 10 and 16 channel units.

Two powerful tools for retail managers and law

enforcement agencies are featured in this product: support for on-site printing of images and a built-in CD-R for rapid transfer of important video, both at the touch of a button.

Any range of recorded video can be easily copied to a blank recordable CD. The copied video can be played back without installing any software on the playback PC.

Operating StoreSafe is simple. Its front panel controls

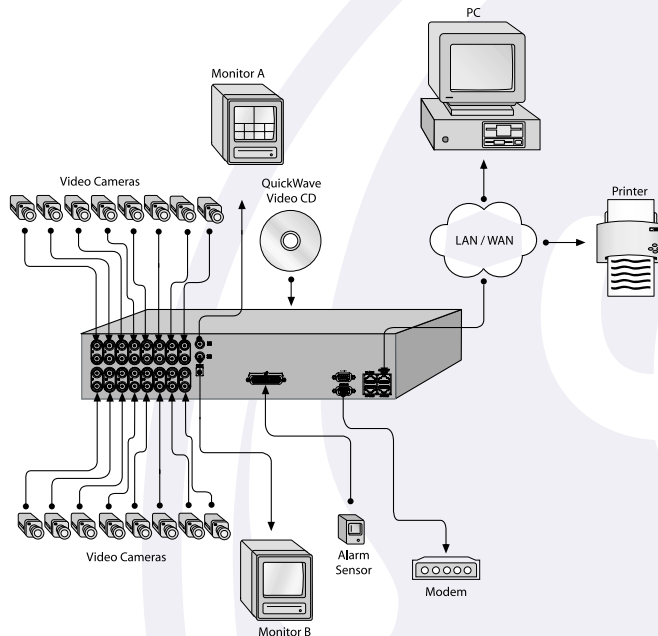

## Features

- Built-in CD-R with one-button video copy
- One-button printing capability
- Triplex multiplexer operation
- Parallel Video Processing (PVP) for ultra-fast recording up to 30 pps (25 pps PAL)
- Ethernet LAN/WAN capability, TCP/IP protocol
- Set separate recording rates, mode, and image quality for each camera.
- Post alarm recording
- E-mail notification upon alarm, video loss, record status and more
- View live or recorded images remotely using WaveReader™ software

simulate multiplexer and VCR controls. Easy-to-use on-screen menus facilitate fast and effortless setup.

With its exclusive AutoInstall feature, StoreSafe self-configures on power-up, standing by in event mode until activity takes place within its field of view. Recording begins when motion is detected. Recording rates and image quality (high, medium, and standard settings) are selectable by camera.

StoreSafe includes WaveReader, a graphical user interface that enables users to use a PC remotely to control StoreSafe across a network or dial-up connection for viewing live video, playing back video, and searching video.

## Easy-to-use

*StoreSafe's design emulates multiplexer and VCR controls for easy, intuitive use.*



**GE Interlogix**

**Product  
Specification**

## Technical Specifications

### Inputs

Camera:	4, 10, or 16 looping BNC connectors, NTSC/EIA or PAL/CCIR compatible; auto-terminating
Conditioning:	AGC, 0.5 to 2.0 V pk-pk video accepted
Termination:	Automatic, 75 Ω or Hi-Z if looped
RS232 Port 1:	DB9 male connector, for POTS, remote control and front panel emulation

### Video Outputs

Monitor A Composite:	One monitor A multiscreen output, BNC connector, NTSC/EIA or PAL/CCIR compatible
Monitor B Composite:	One monitor B full-screen switched output, BNC connector, NTSC/EIA or PAL/CCIR compatible

### Archive

Archive Device Type:	Internal CD-R drive
----------------------	---------------------

### Network

Type:	10/100 Ethernet (auto-sensing); one RJ45 connector
-------	--

### Video

Display Memory:	2048 x 1024 memory array per monitor; 32 Mb total display memory
Colors:	YUV 4:2:2, 16.8 million colors
Grayscale:	256 levels
Horizontal Resolution:	720 pixels
Vertical Resolution:	484 active lines NTSC/EIC, 576 active lines PAL/CCIR

### Video Motion and Activity Detection

Zones per Camera:	256, 16 x 16 grid
Sensitivity Settings:	10 levels
Gray Levels per Zone:	256 levels
False Alarm Rejection Processing:	3 levels
Size Discrimination:	256 levels
Status Output:	Link to relay

### Recording

Hard Drive:	Check <a href="http://www.GE-Interlogix.com">www.GE-Interlogix.com</a> for current hard drive sizes
Record Speed:	Selectable; 30 pps (25 pps PAL) to 0.125 pps; event, time-lapse, or both
Compression:	Wavelet format; standard-, medium-, and high-quality settings selectable per camera
Record Mode:	Time Lapse, Event, and Time Lapse + Event

### Alarm Handling

Alarm Inputs:	4, 10, or 16 N/O
Relay Outputs:	2 N/O

### Printing

Ethernet Port:	Requires compatible printer connected via print server <sup>1</sup>
----------------	---

### Miscellaneous


Input Voltage:	12 VDC, 90 V – 264 V AC/DC adapter included
Power:	35 W nominal
Temperature:	0 to 40 °C (32 to 104 °F), operating
Relative Humidity:	90 percent, noncondensing
Weight:	21 lb (9.525 kg)
Dimensions:	W 13 in x H 3.5 in x D 13.5 in (33.02 cm x 8.89 cm x 34.29 cm)

### Options

CBR-RK5-G:	Rack mount ears
------------	-----------------

## Ordering Information

Choose your BNC connectors and hard drive to determine the model number of the StoreSafe that meets your specifications.

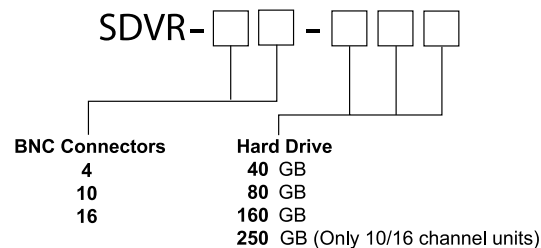

<sup>1</sup>Printer and Print Server must be purchased separately. HP 3820 and Hawking Printer Server (Model PN7127P) are the only approved compatible products.



## GE Interlogix

MAILING ADDRESS  
Kalatel  
4575 Research Way, STE 250  
Corvallis, OR 97333 USA  
[www.GE-Interlogix.com](http://www.GE-Interlogix.com)

AMERICAS  
800-469-1676 (US only)  
tel 541-754-9133  
fax 541-754-7162

ASIA  
tel 852-2907-8108  
fax 852-2142-5063

AUSTRALIA  
tel 61-3-9259-4700  
fax 61-3-9259-4799

EUROPE  
tel 32-2-725-11-20  
fax 32-2-721-86-13

LATIN AMERICA  
tel 561-912-5321  
fax 561-994-6224