


Temp. 25 40 50
 Shift index for long-time delay only.

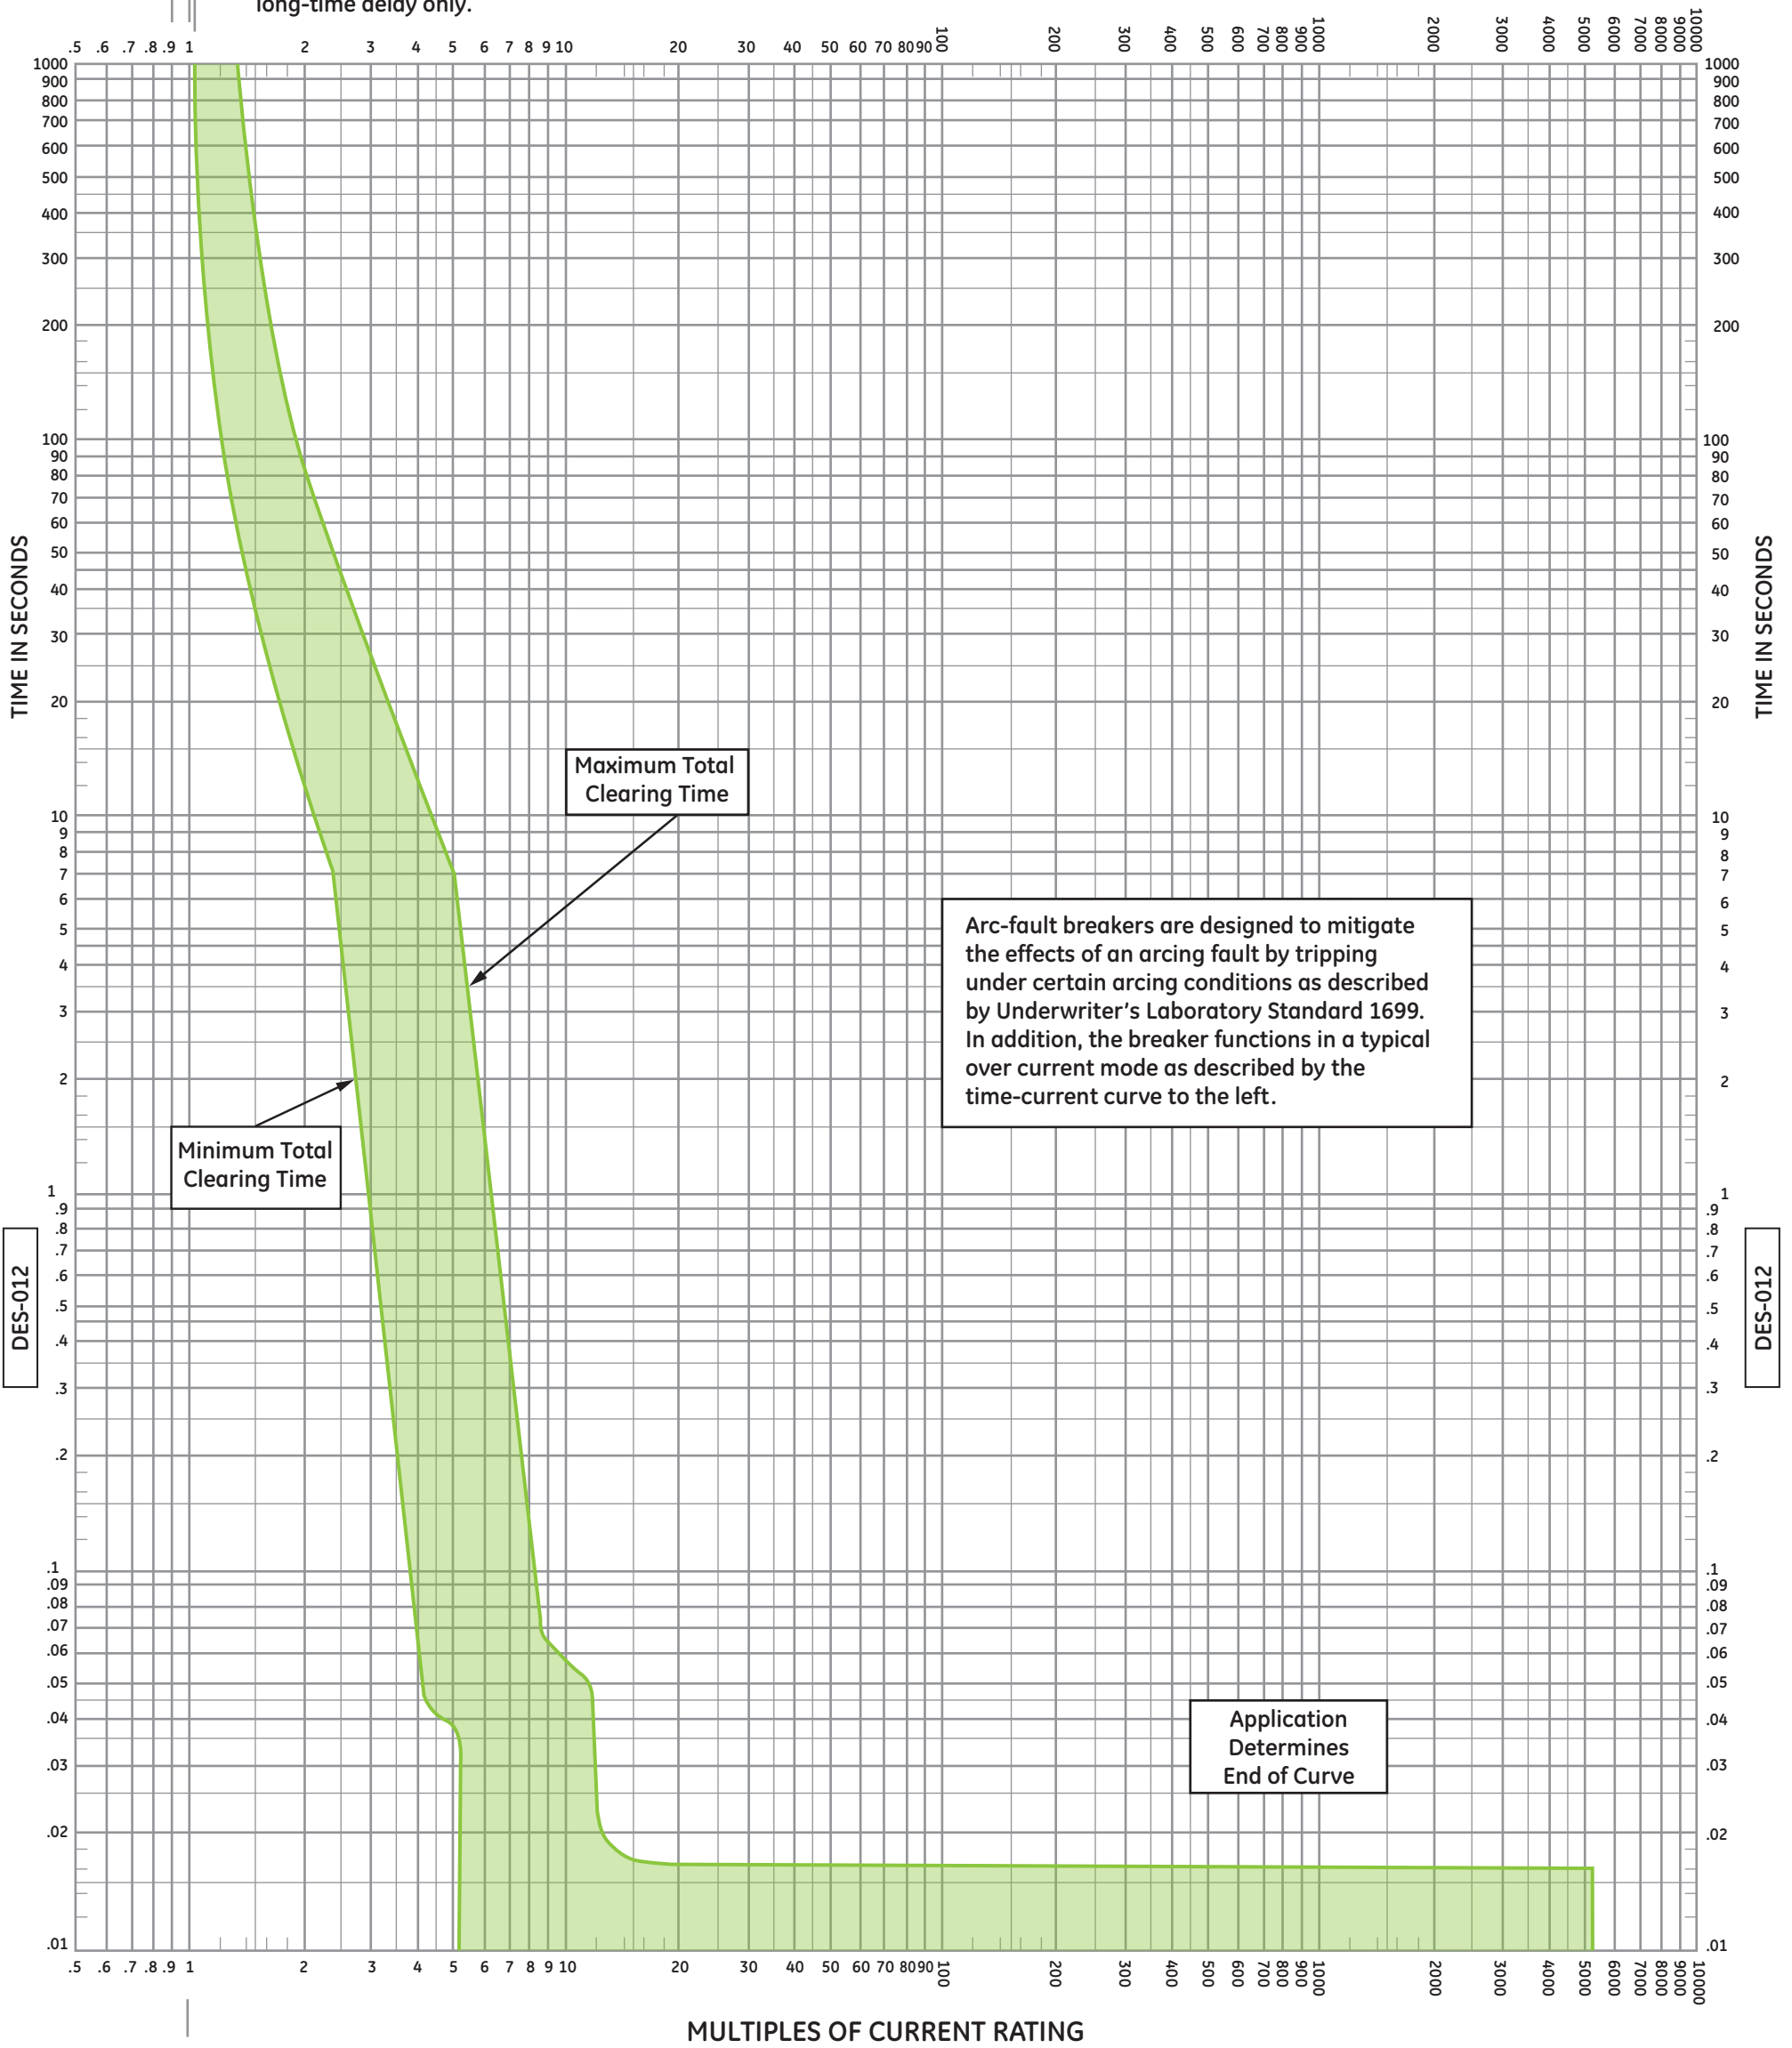

GE Consumer & Industrial -
 Electrical Distribution

Current Ratings
 20 Amperes

Voltage Ratings
 1-pole - 120 Vac
 2-pole - 120/240 Vac, 208Y/120 Vac

Frequency Ratings
 60 Hertz

**Molded Case Circuit Breaker
 with Arc Fault Circuit Interrupter
 Q Line**

Types THQL, THHQL, THQB,
 THHQB AFCI (MOD C)
 Long-time Delay and Instantaneous
 Time-Current Curves

Curves show circuit breaker in open air, 40°C ambient,
 wired with conductors of corresponding rating, no prior load.
 For all other ambients, use rating shift index at top of sheet.

DES-012

Adjustments
 Long-time delay thermal trip: not adjustable
 Instantaneous magnetic trip: not adjustable