



MULTIPLE OF SENSOR

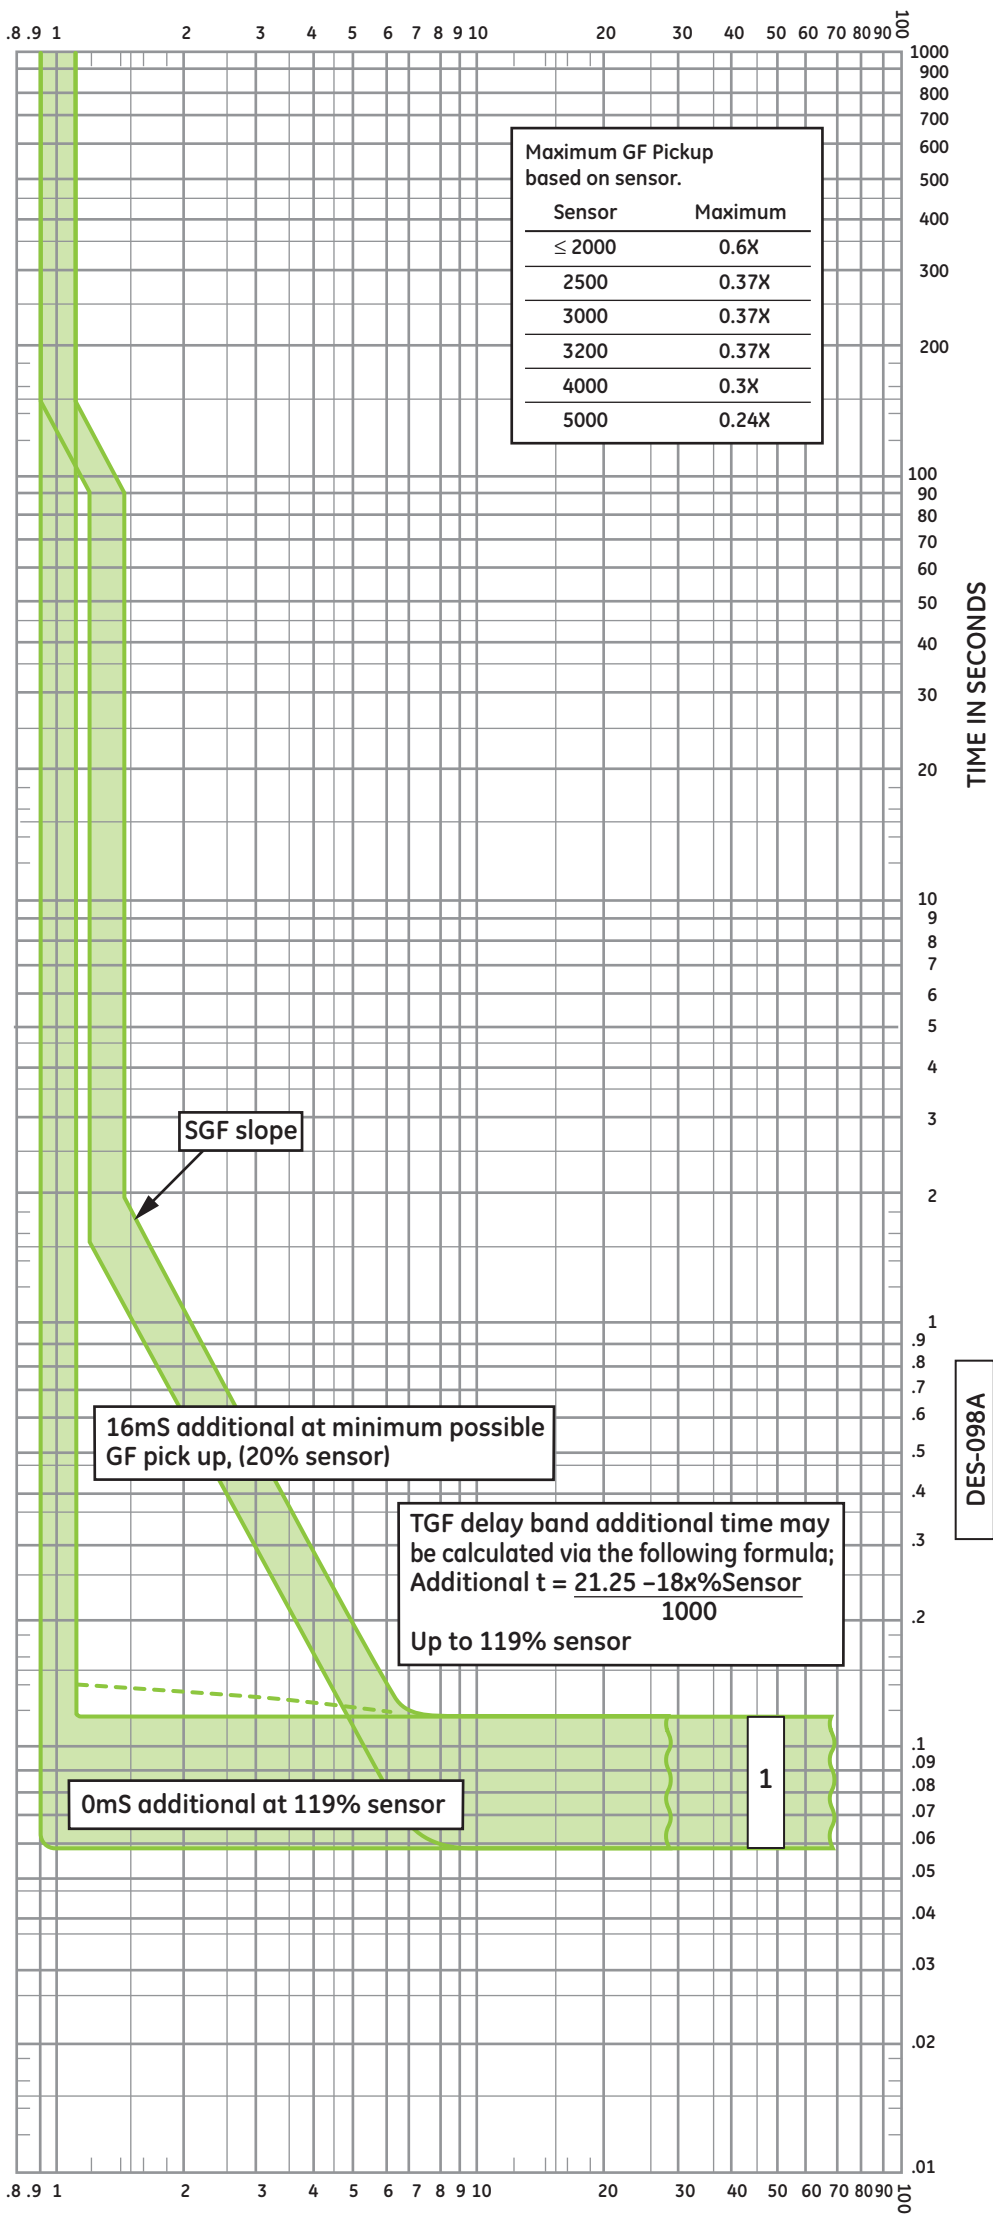

Maximum GF Pickup based on sensor.	
Sensor	Maximum
≤ 2000	0.6X
2500	0.37X
3000	0.37X
3200	0.37X
4000	0.3X
5000	0.24X

MULTIPLE OF SENSOR

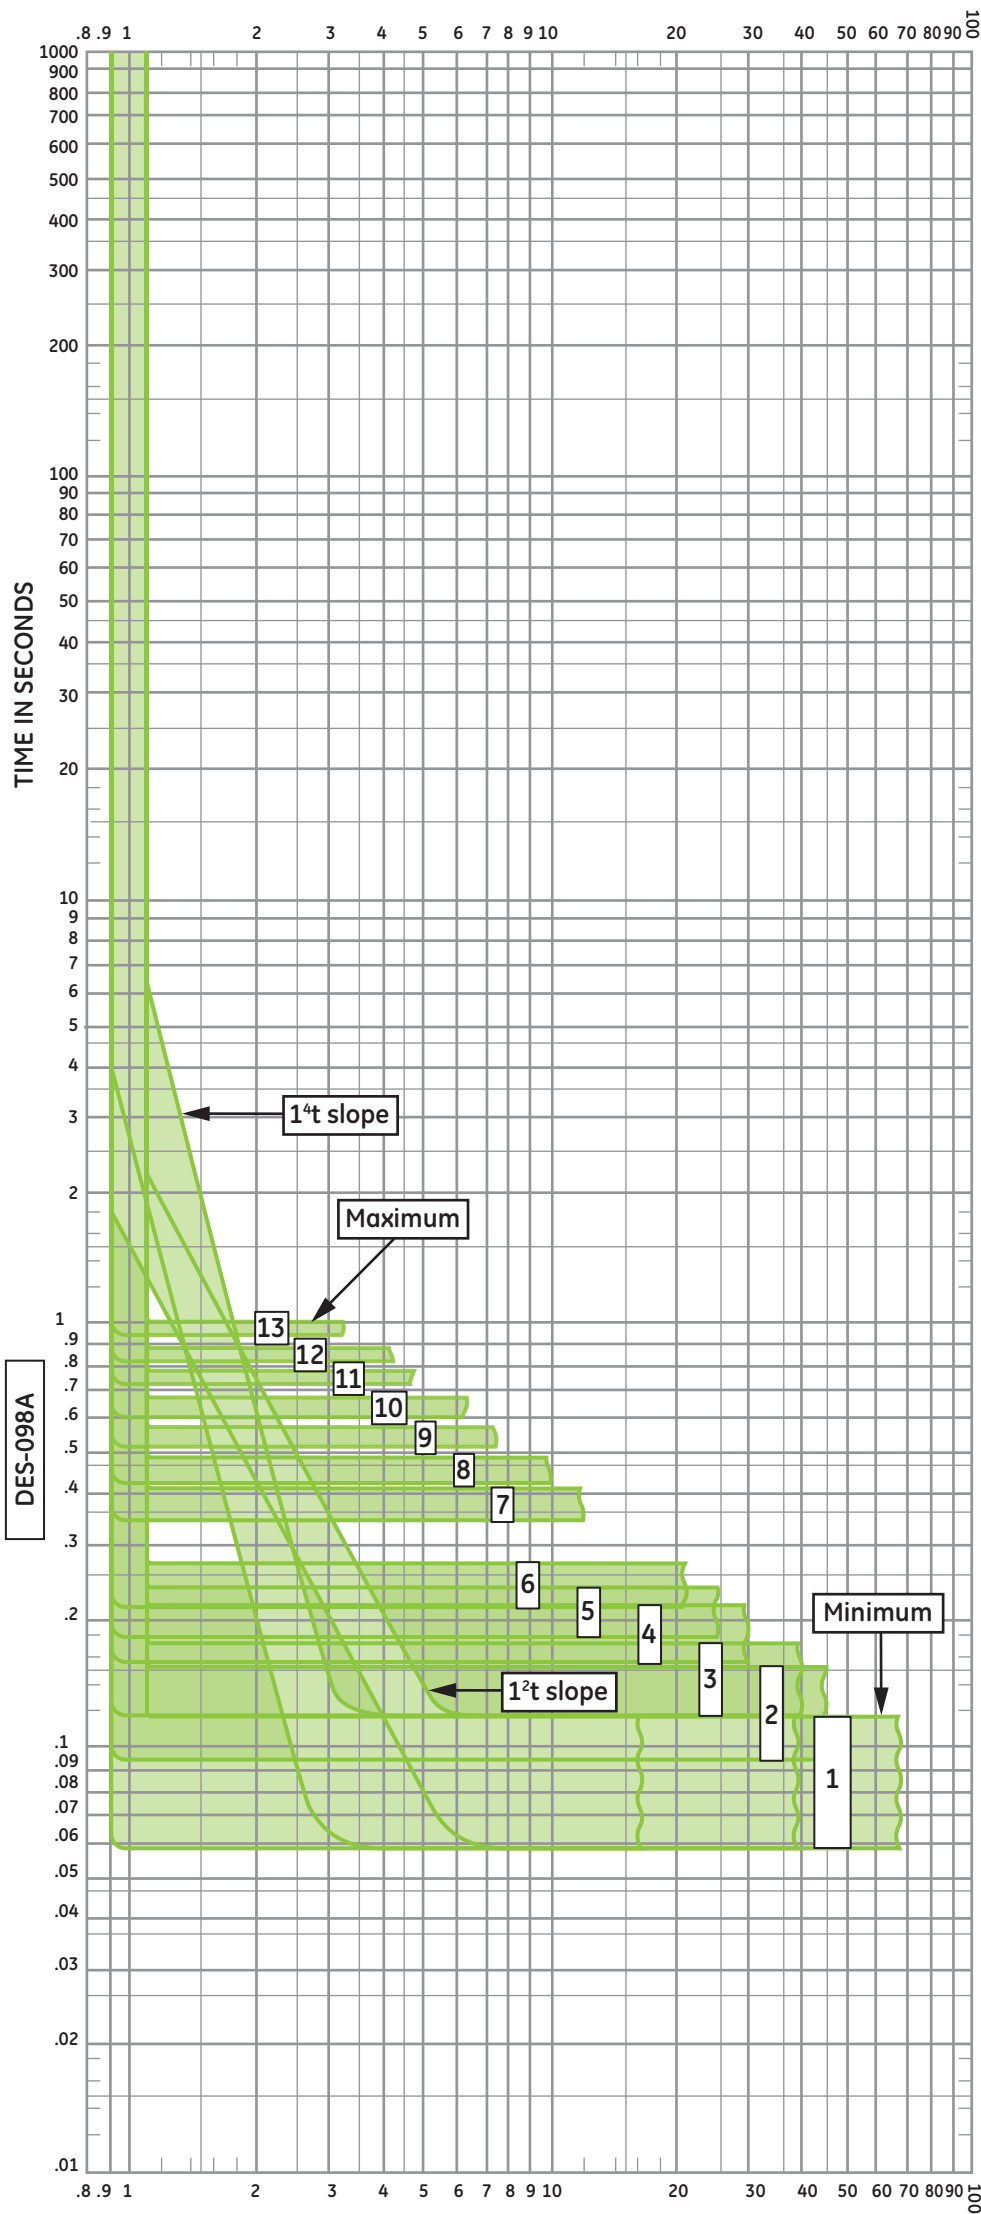

Low-Voltage Circuit Breakers

Frames 800-5000A AKR & WavePro  
 Frames 800-4000A PowerBreak & PowerBreak II

EntelliGuard TU Trip Unit for PowerBreak, PowerBreak II, AKR and WavePro Circuit Breakers  
 UL489 and UL1066 Stored Energy Mechanism Circuit Breakers

DES-098A

Pickup Range  
 Minimum 0.2X Sensor  
 Maximum up to 0.6x Sensor  
 Not to exceed 1200A

All Voltages: 600 Vac and below

Ground Fault

Curves apply at 60 Hertz and from -20°C to 55°C circuit breaker ambient temperature.