


MULTIPLE OF TRIP RATING PLUG

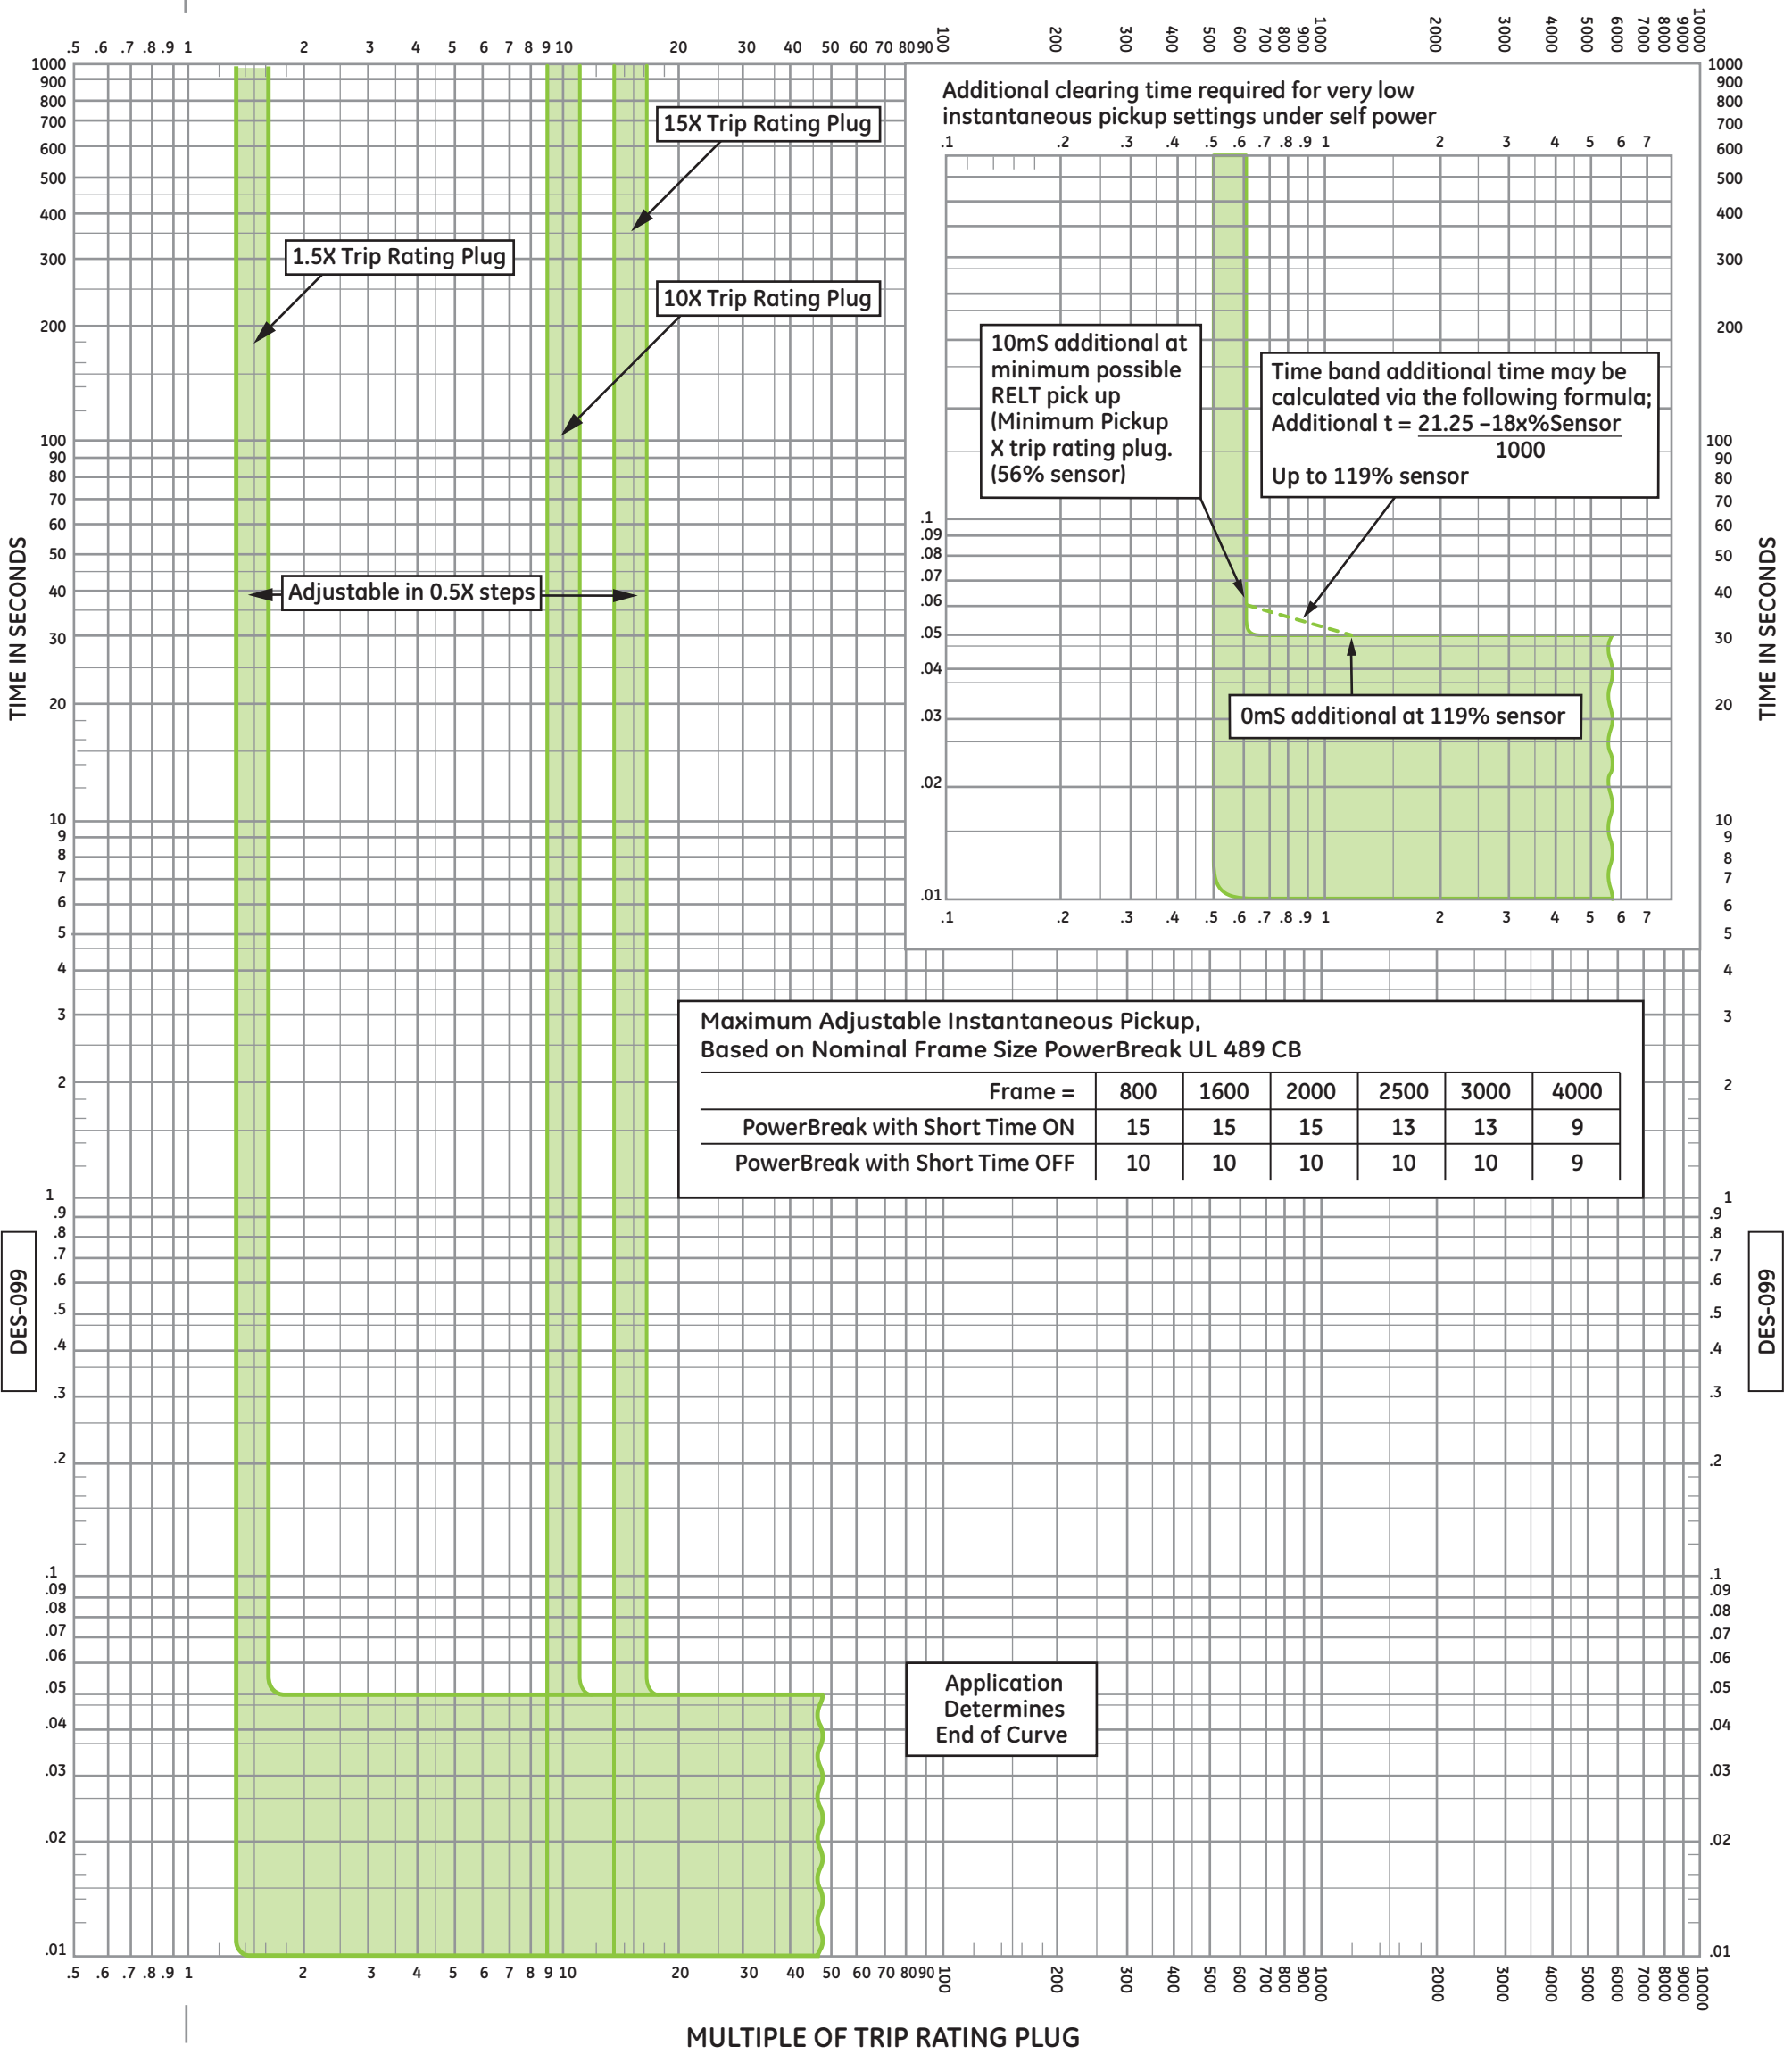

Low-Voltage Circuit Breakers

DES-099

Frames 800-4000A PowerBreak

EntelliGuard TU Trip Unit for PowerBreak Circuit Breaker UL 489 Stored Energy Mechanism Circuit Breakers

Minimum Pickup 1.5X Maximum per frame

All Voltages: 600 Vac and below

Instantaneous trip

Curves apply at 60 Hertz and from -20°C to 55°C circuit breaker ambient temperature.