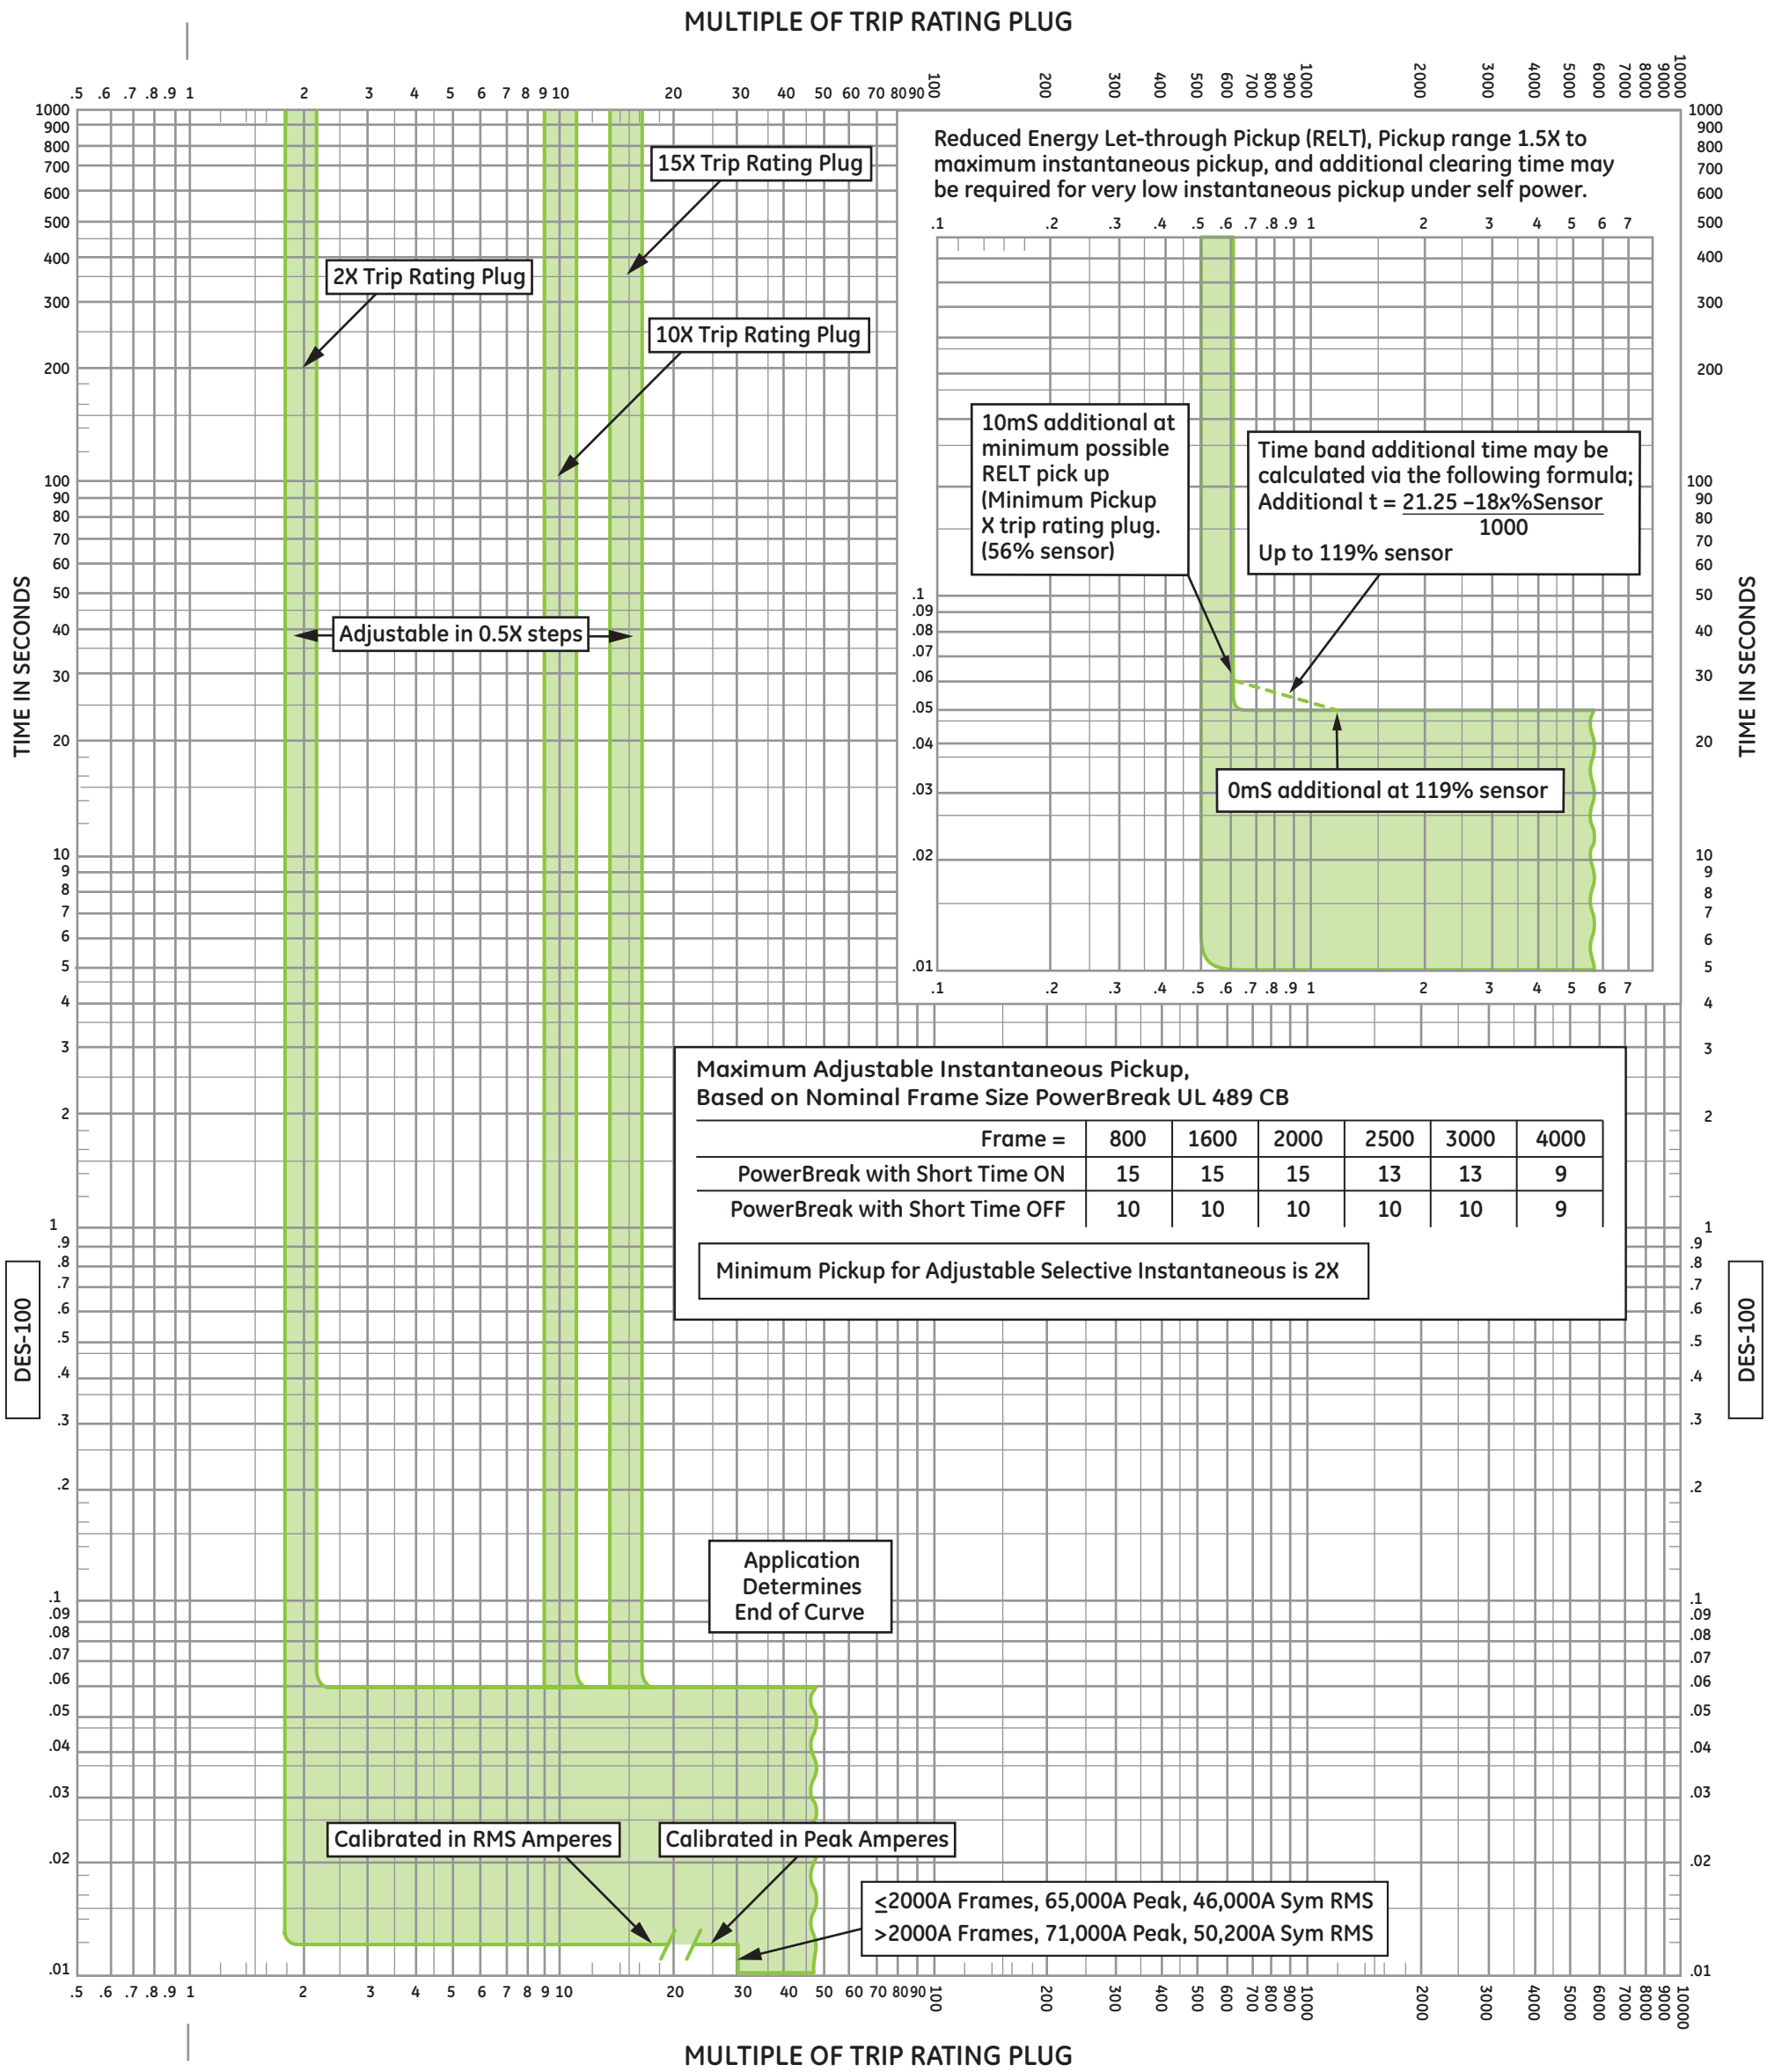

Maximum Adjustable Instantaneous Pickup, Based on Nominal Frame Size PowerBreak UL 489 CB

Frame =	800	1600	2000	2500	3000	4000
PowerBreak with Short Time ON	15	15	15	13	13	9
PowerBreak with Short Time OFF	10	10	10	10	10	9

Minimum Pickup for Adjustable Selective Instantaneous is 2X

Frames 800-4000A PowerBreak II

All Voltages: 600 Vac and below

Low-Voltage Circuit Breakers

EntelliGuard TU trip unit for PowerBreak II Circuit Breakers
UL 489 Stored Energy Mechanism Circuit Breakers

Adjustable Selective Instantaneous Trip and HSIOC (Override)

Curves apply at 60 Hertz
and from -20°C to 55°C circuit breaker ambient temperature.

DES-100

Adj Inst Minimum Pickup 2X
Maximum per frame