


MULTIPLE OF TRIP RATING PLUG

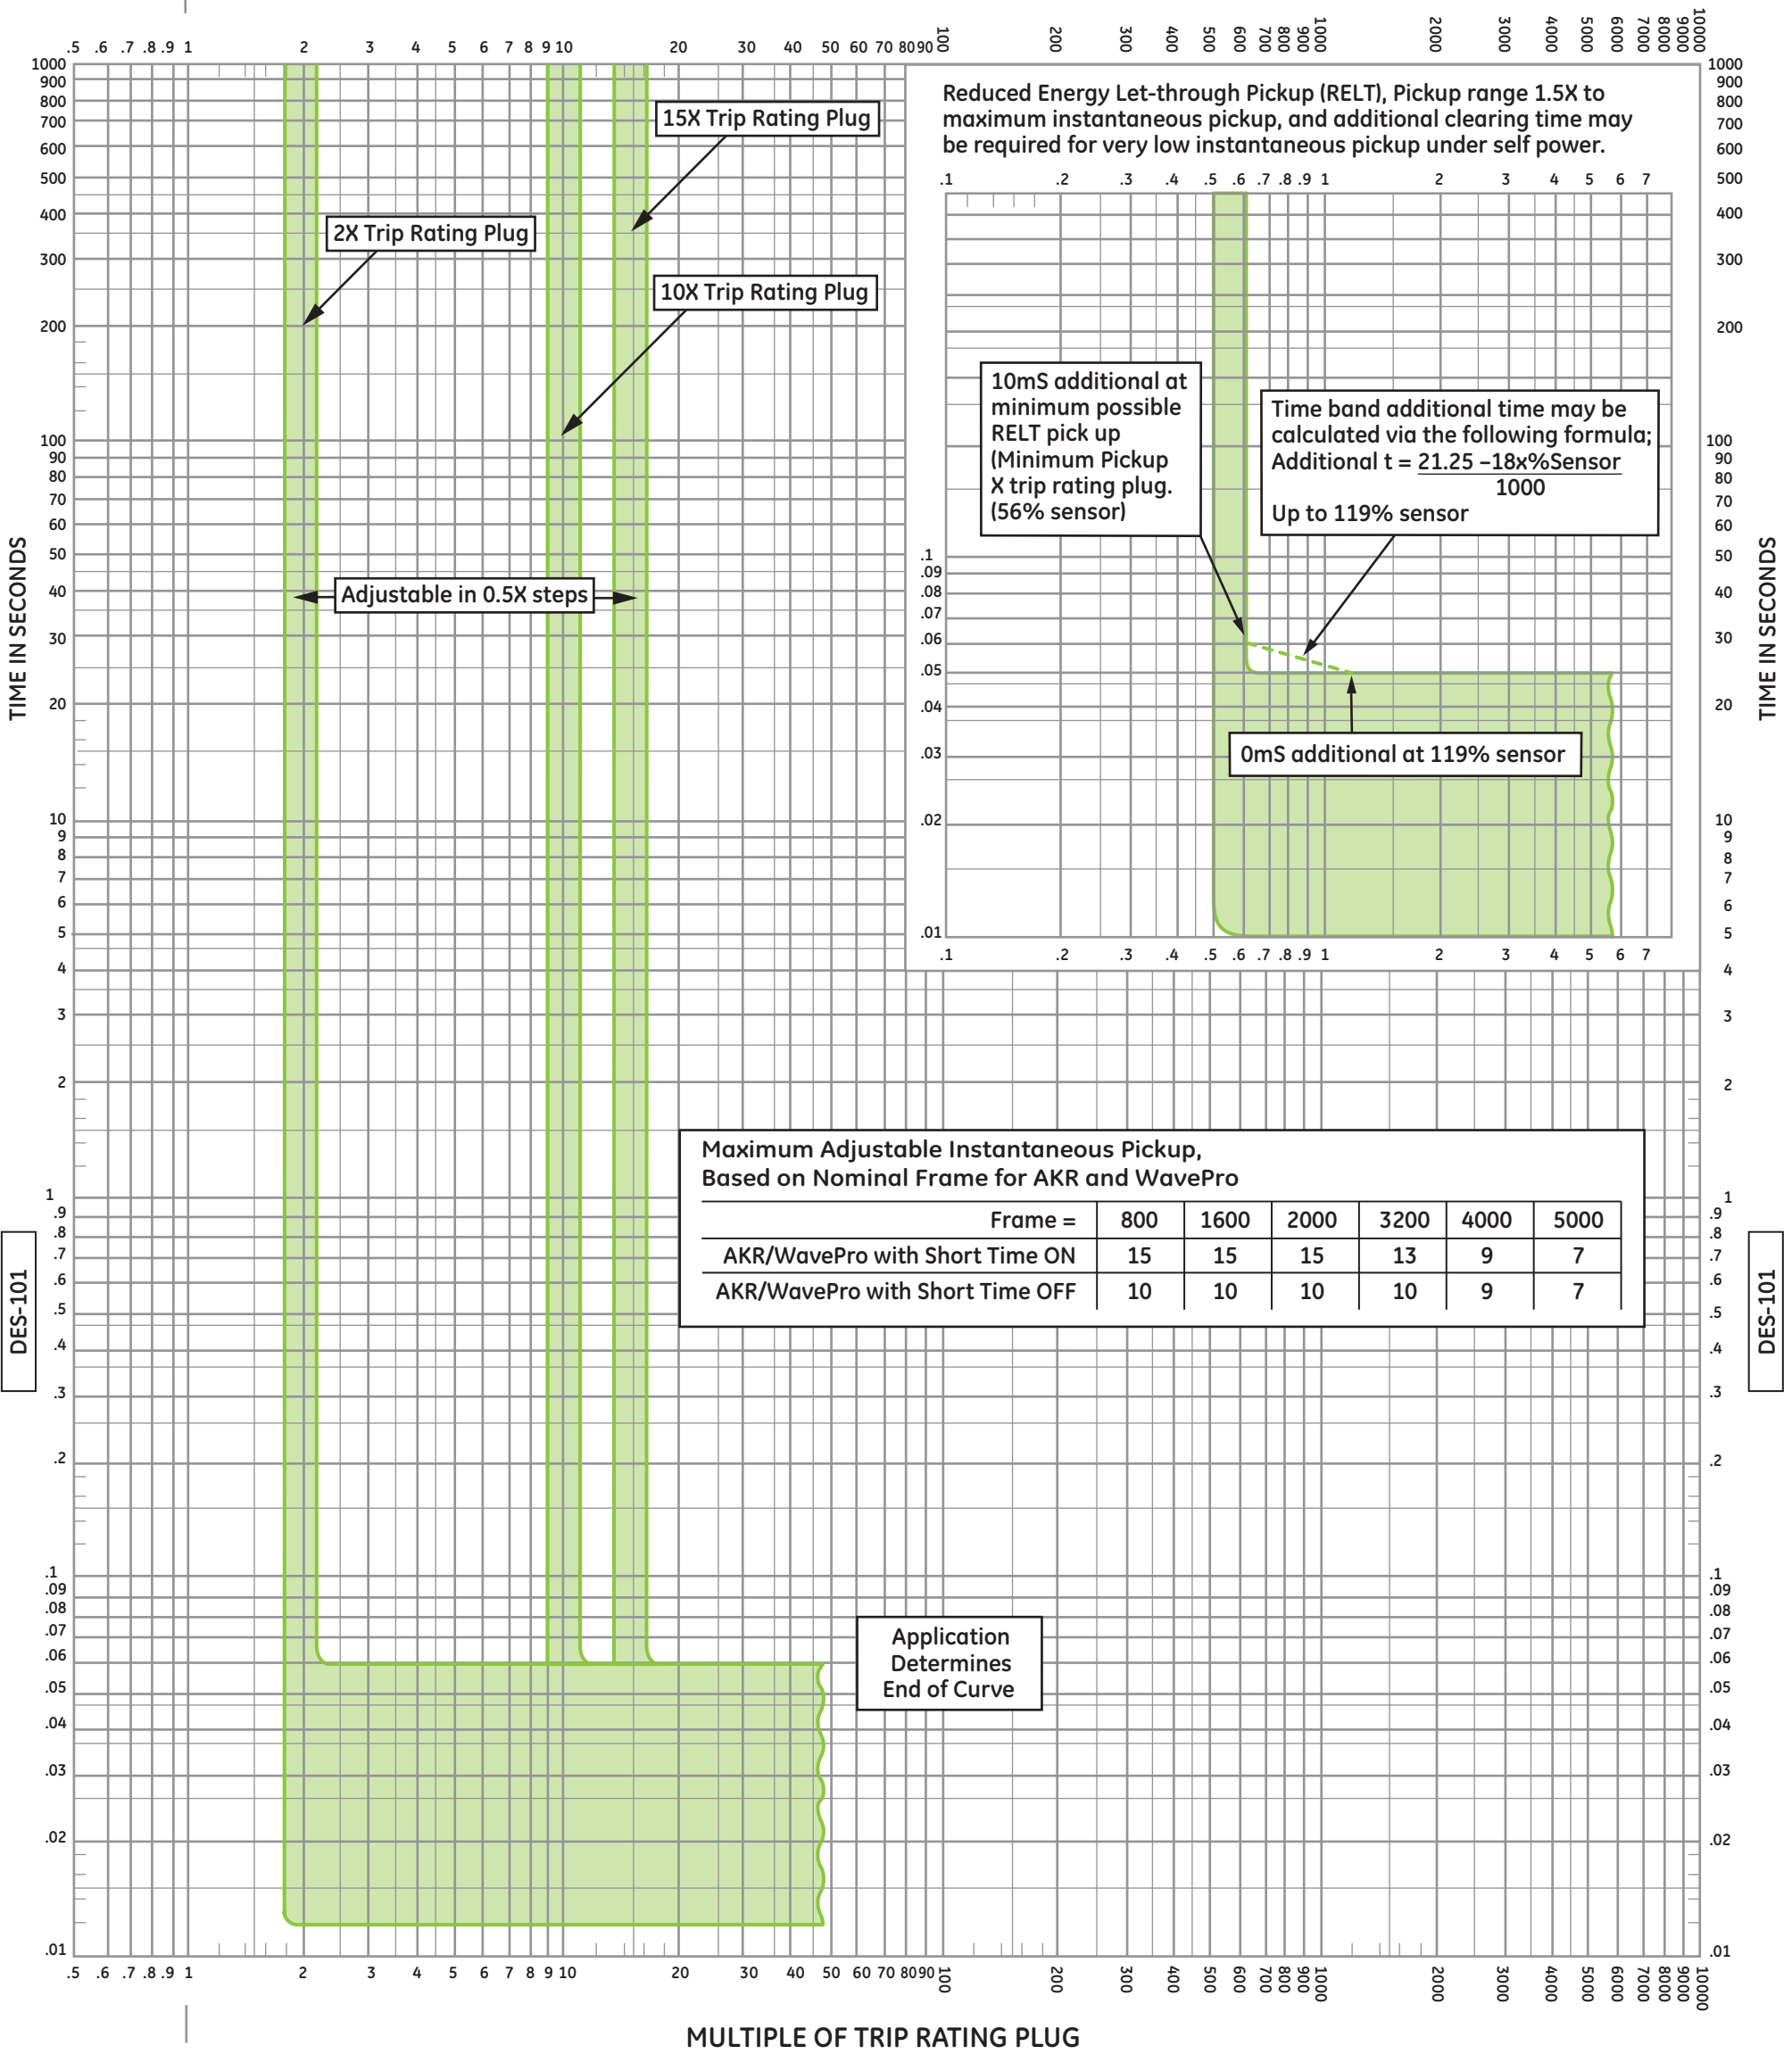

Low-Voltage Circuit Breakers

DES-101

Frames 800-5000A AKR & WavePro

EntelliGuard TU trip unit for Low Voltage Power CB
UL 1066 Stored Energy Mechanism
Circuit Breakers

Adj Inst Minimum Pickup 2X
RELT Minimum Pickup 1.5X
Maximum per frame

All Voltages: 600 Vac and below

Adjustable Selective Instantaneous Trip
Reduced Energy Let Through
Instantaneous Trip (RELT)

Curves apply at 60 Hertz
and from -20°C to 55°C circuit breaker ambient temperature.