


# PowerMark Gold™ 150 & 200 Amp 24/42 Circuit Bottom Feed Outdoor Load Center

- 42 circuit load center
  - Bottom feed
  - Side hinged door
  - 14" wide box
  - NEMA 3R outdoor enclosure
  - Interior and cover field convertible to top feed application
  - More back knockouts for exterior feeds
  - Closing cap included
  - Larger neutral bars with 29 holes each
- 
- Single phase, three wire, 120/240 VAC, 22 kAIC rated
  - UL Listed (UL Standards No. 67 for Panelboards)
  - 60°C/75°C conductor rating
  - Suitable for use as Service Entrance Equipment when installed in accordance with the National Electrical Code


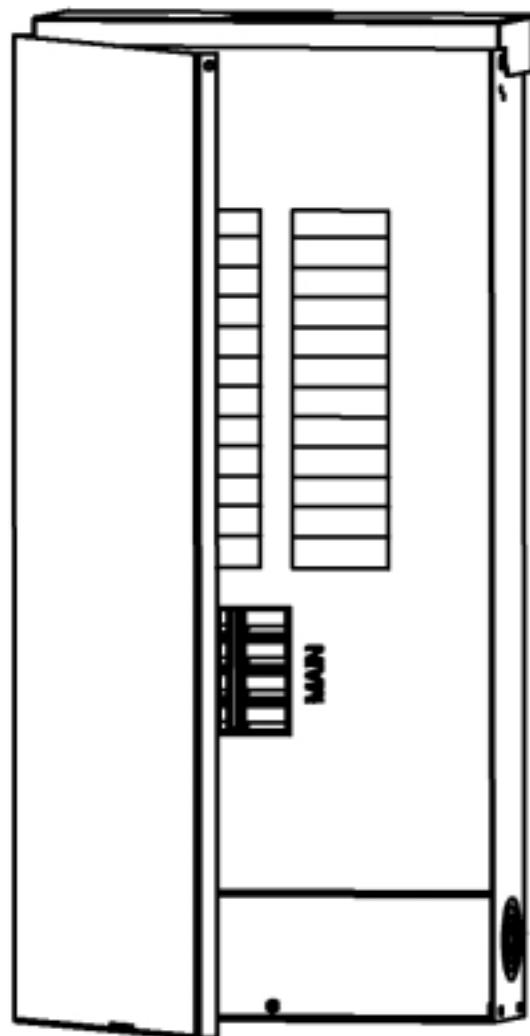


# PowerMark Gold™ 150 & 200 Amp 24/42 Circuit Bottom Feed Outdoor Load Center

Enclosure Type Outdoor (NEMA 3R)  
 Equipment Ground Kit TKG12, TKG24, TKG32 & TKG42 Field Installable  
 Agency Certification UL

Main Ampere Rating	Catalog Number	Type	1" Spaces		1/2" Spaces		Total 1 Pole Spaces	Box R39 Enclosure Dimensions (inches)			
			1 Pole	2 Pole	1 Pole	2 Pole		Width	Height	Depth	Main Wire Size (AWG/kcmil) Cu-Al
200	TM2420R42B	Main Breaker	24	12	36	18	24	14	31-11/16	4-5/8	1-250 (Cu), 2/0-250 (Al)
150	TM2415R42B										
200	TLM2420R42B	Main Lugs									

## Knockouts

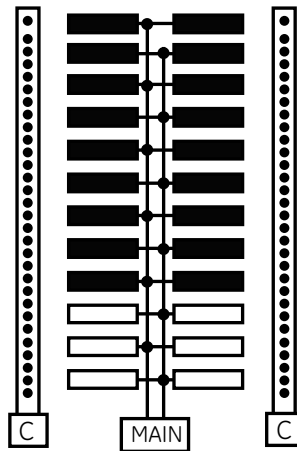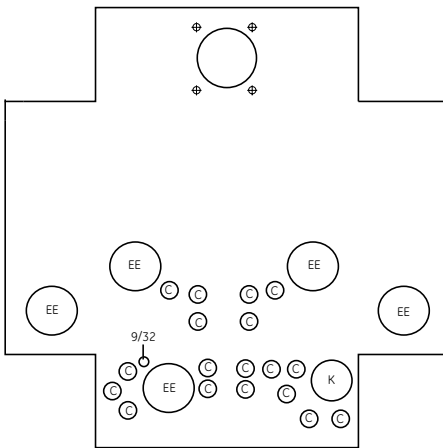

Conduit Size in Inches	Symbol		
	C	K	EE
3/8	—	—	—
1/2	—	—	1/2
3/4	3/4	3/4	3/4
—	1	1	1
—	1 1/4	—	—
—	1 1/2	1 1/2	1 1/2
—	—	2	2
—	—	2 1/2	2 1/2

Breaker Symbol	Breaker Fill	
	1" THQL	1/2" THQP
	1	2
	1	—

GE Consumer & Industrial  
 41 Woodford Avenue, Plainville, CT 06062  
 www.GEindustrial.com  
 © 2005 General Electric Company

