


MULTIPLES OF PLUG RATING



MULTIPLES OF PLUG RATING

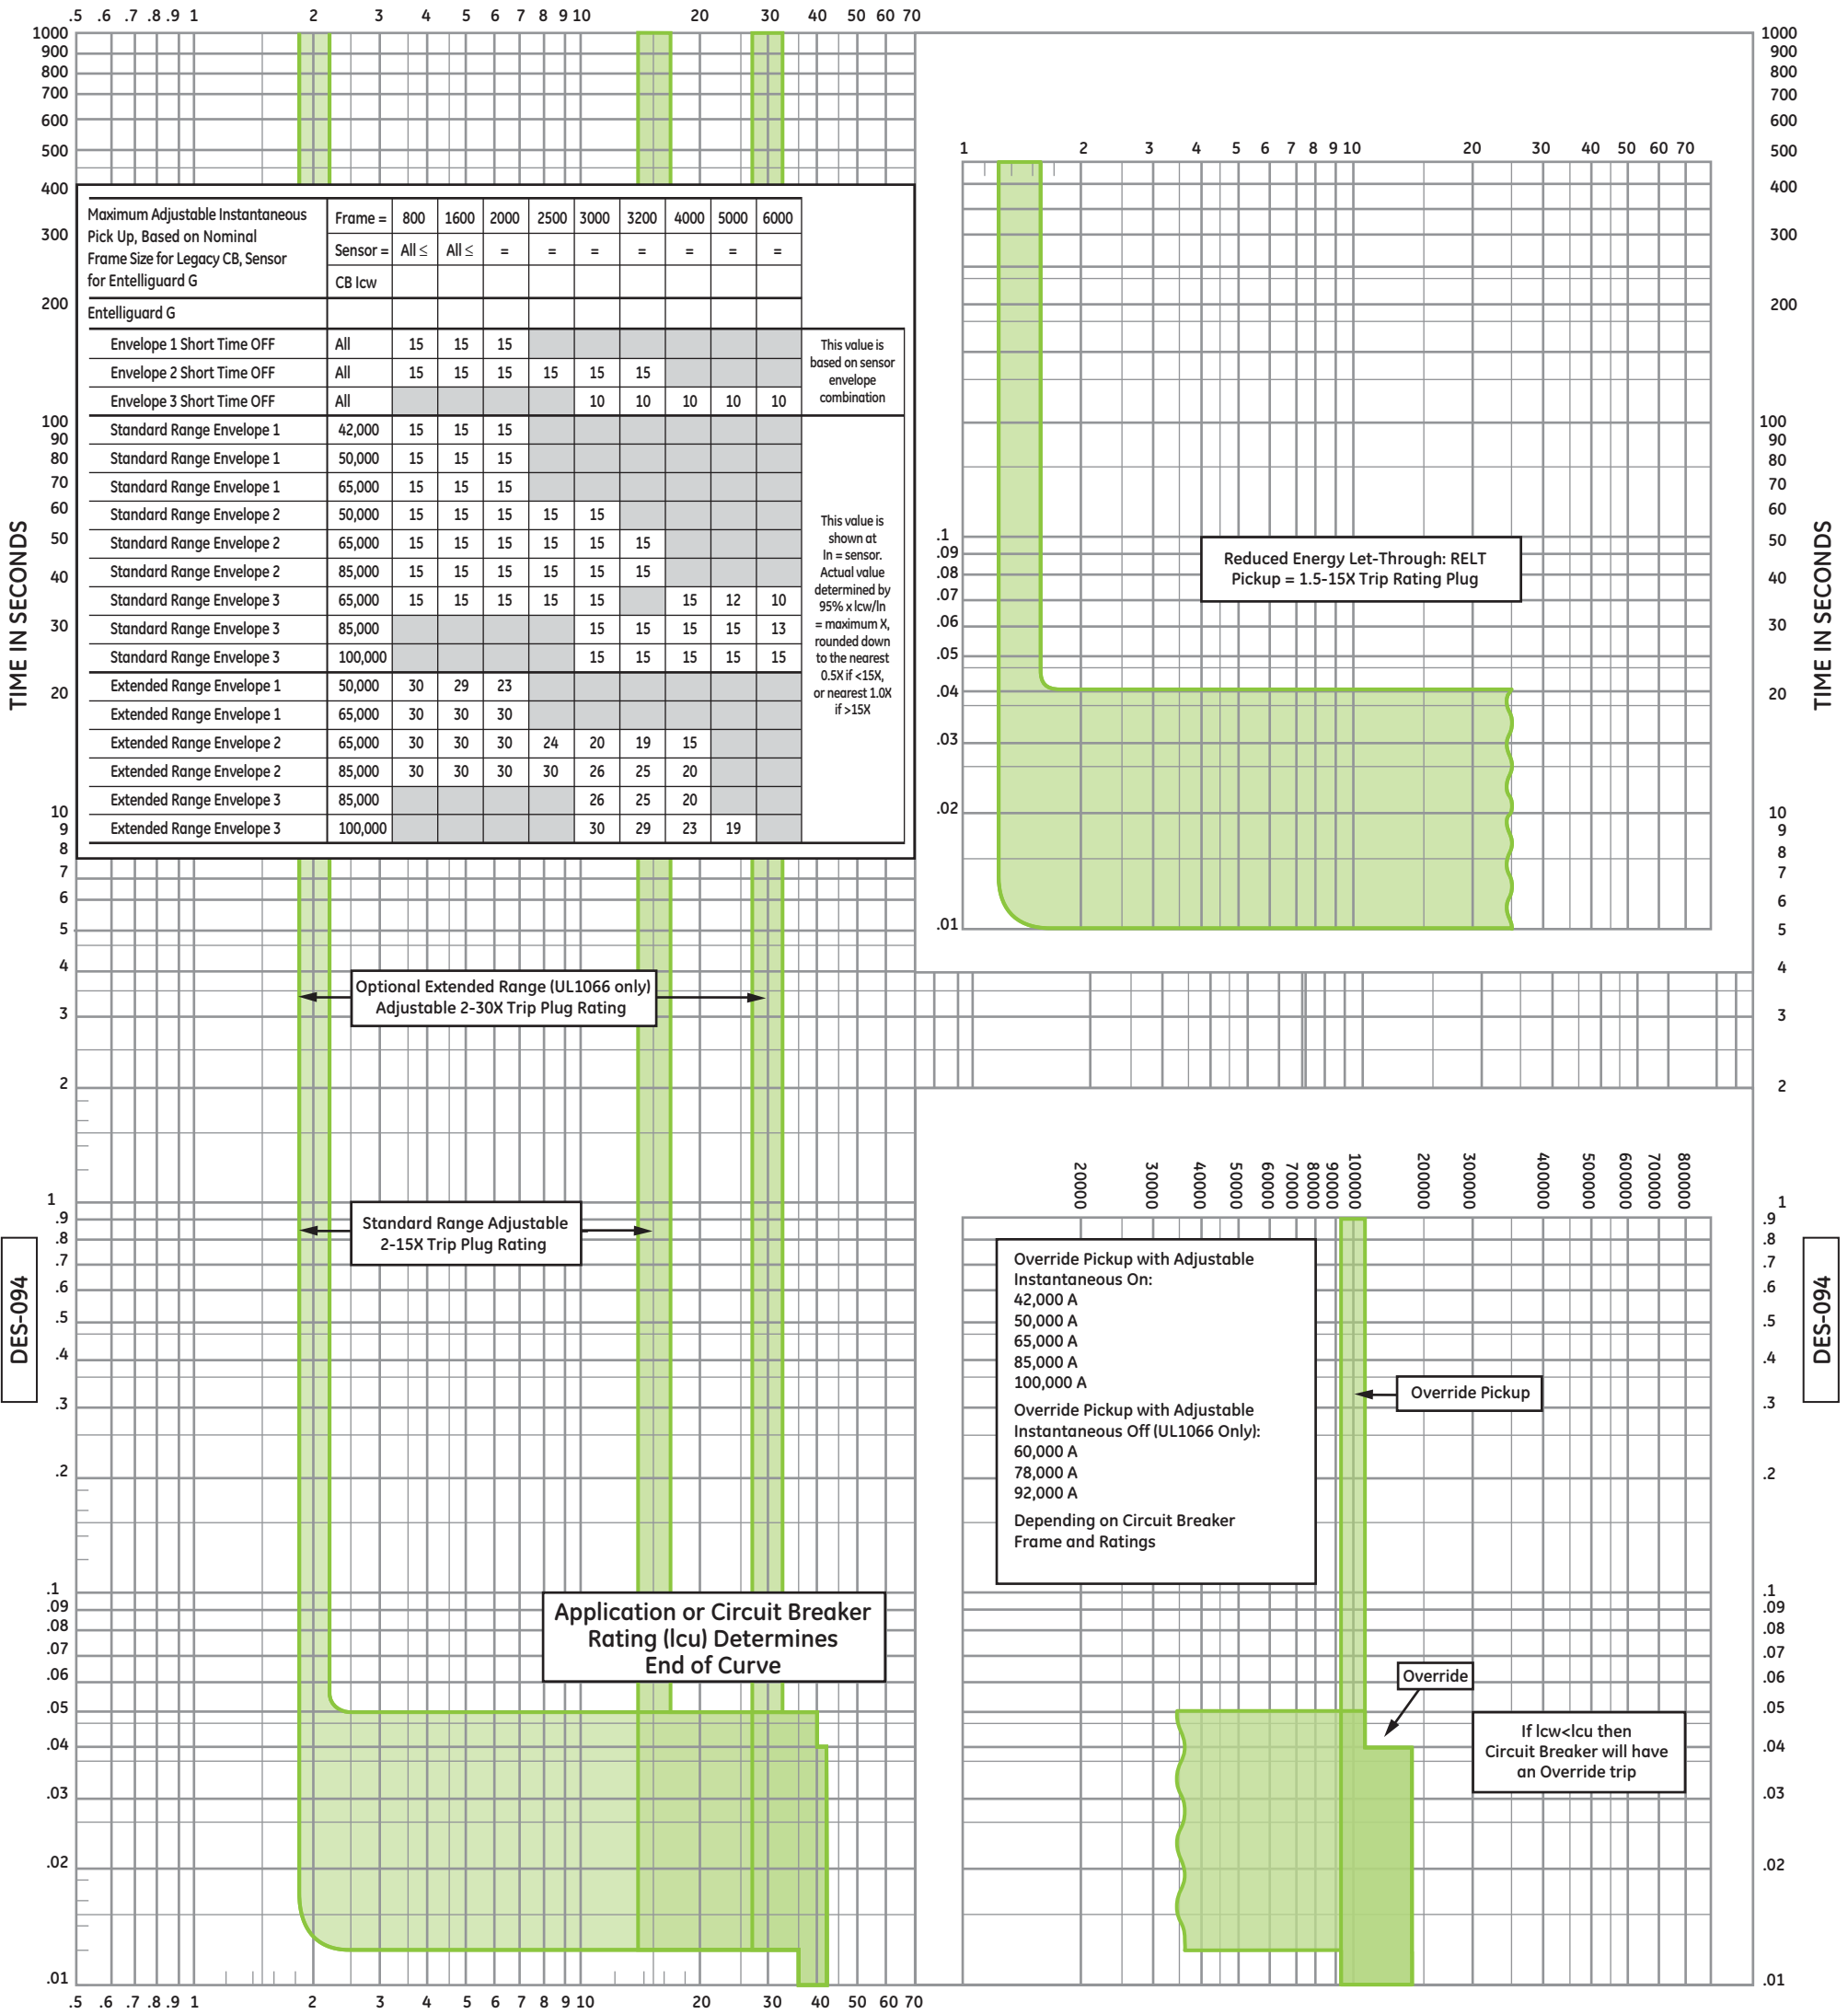

Low-Voltage Circuit Breakers

DES-094

Frames	800-5000A	UL1066
Frames	800-6000A	UL489
Sensors	400-6000A	

EntelliGuard TU Trip Unit for EntelliGuard G Circuit Breakers UL489 and UL1066 Stored Energy Mechanism Circuit Breakers

Pickup Range
 2X-15X Trip Rating Plug Standard
 2X-30X Trip Rating Plug Extended Range
 Maximum Pickup may be limited by CB AIC Rating or Withstand

All Voltages: 600 Vac and below

Instantaneous, Override (HSIOC)
 Reduced Energy Let-Through Instantaneous (RELT)

Curves apply at 60 Hertz and from -20°C to 55°C circuit breaker ambient temperature.