



MULTIPLE OF SENSOR

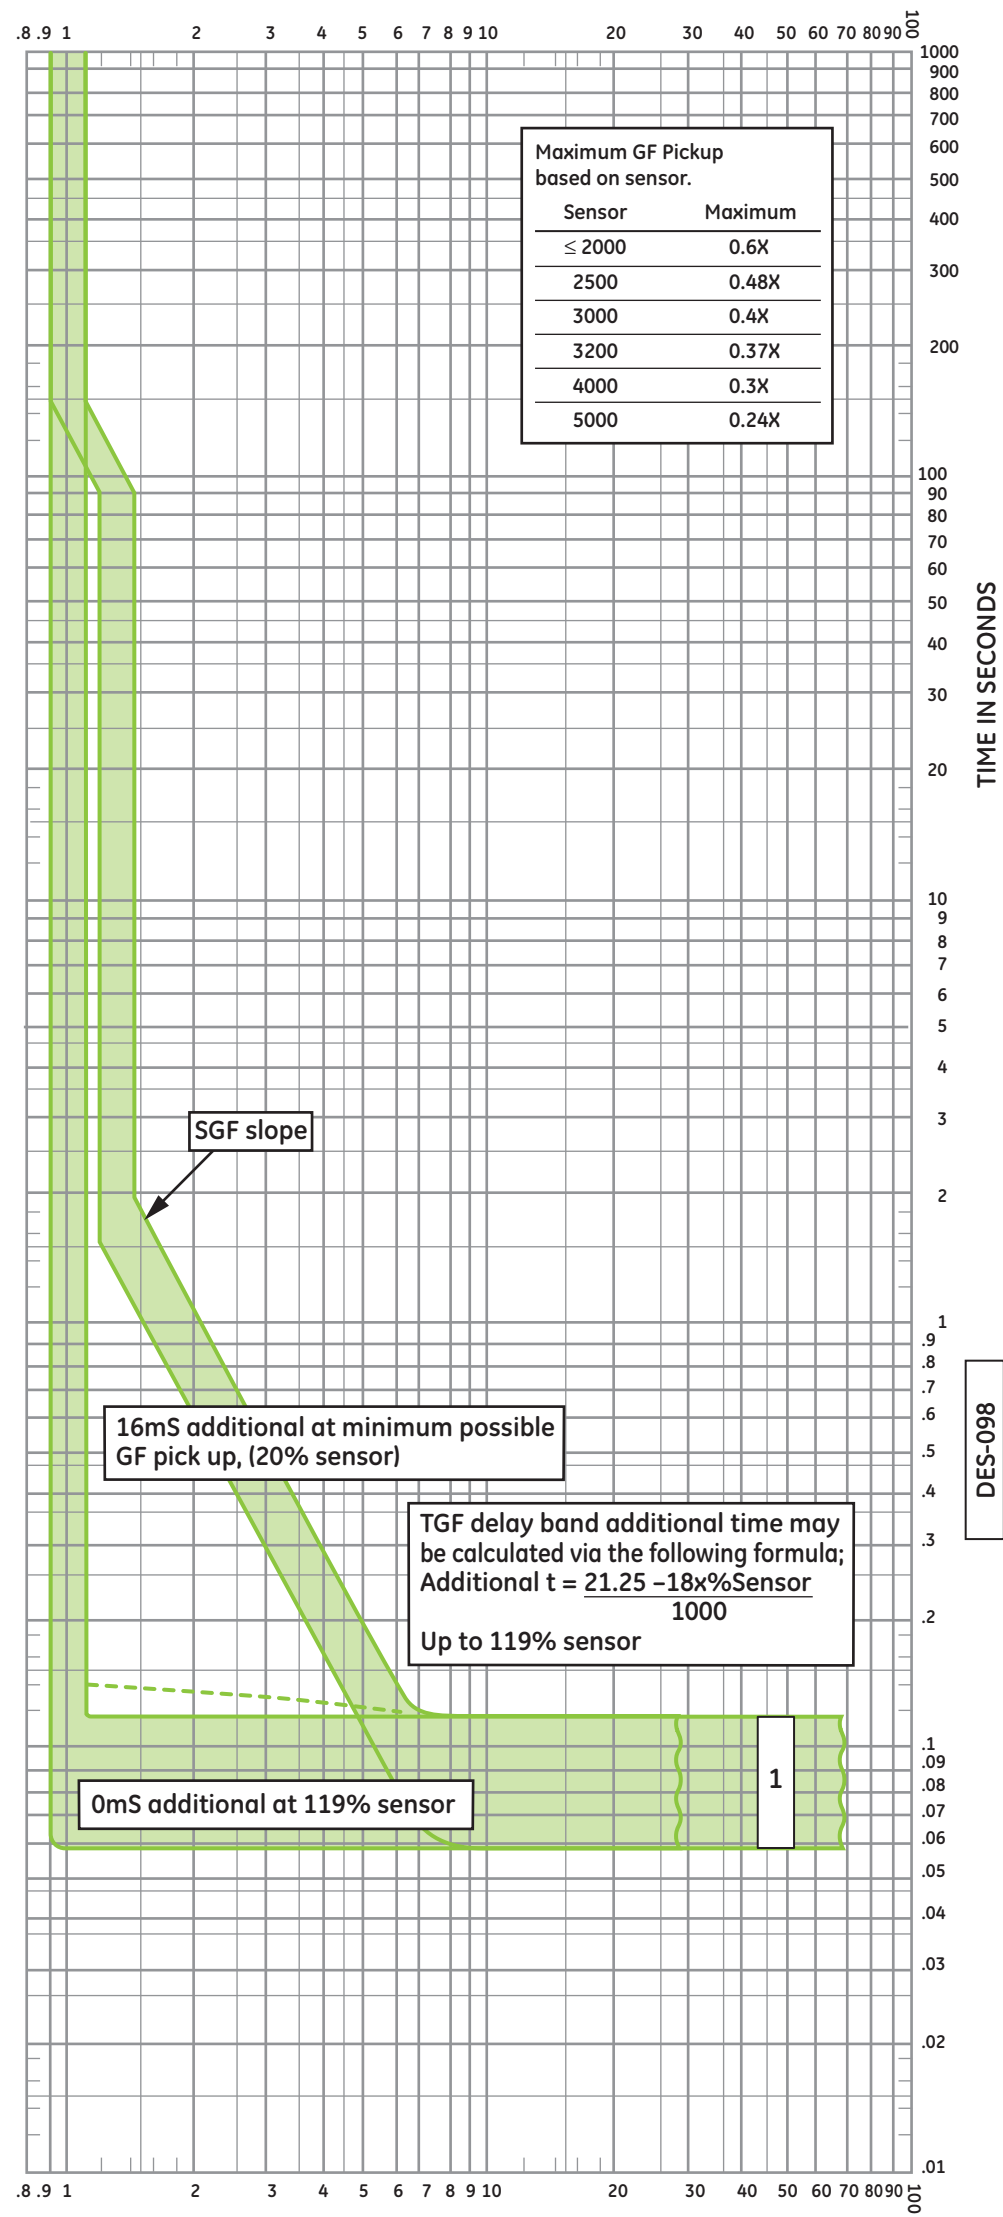

MULTIPLE OF SENSOR

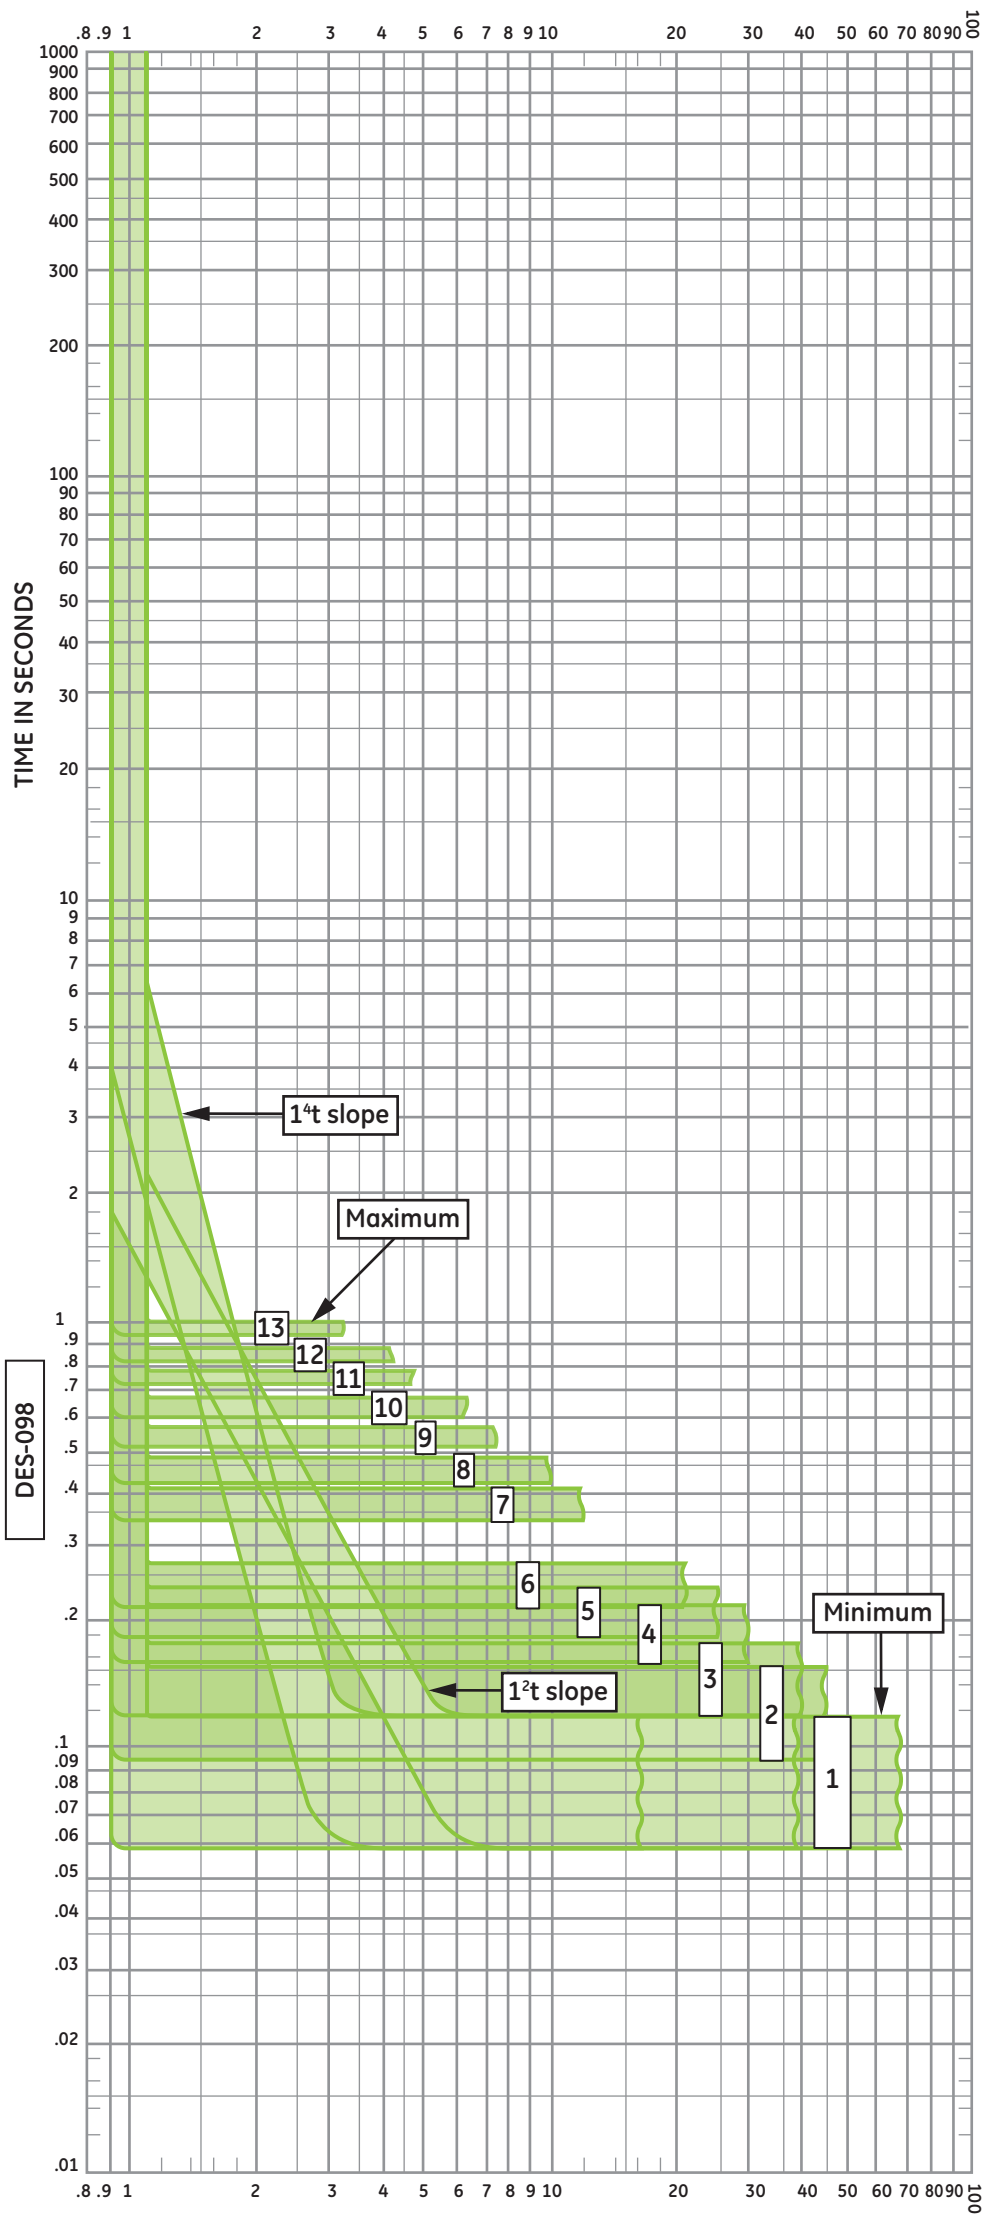

Low-Voltage Circuit Breakers

Frames 800-5000A AKR & WavePro
 Frames 800-4000A PowerBreak & PowerBreak II

EntelliGuard TU Trip Unit for PowerBreak, PowerBreak II, AKR and WavePro Circuit Breakers
 UL489 and UL1066 Stored Energy Mechanism Circuit Breakers

DES-098

Pickup Range
 Minimum 0.2X Sensor
 Maximum up to 0.6x Sensor
 Not to exceed 1200A

Ground Fault

All Voltages: 600 Vac and below

Curves apply at 60 Hertz and from -20°C to 55°C circuit breaker ambient temperature.